

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|-----------|---|
| (51) International Patent Classification ⁷ : A61F 13/15 | A2 | (11) International Publication Number: WO 00/37005 (43) International Publication Date: 29 June 2000 (29.06.00) |
| (21) International Application Number: PCT/US99/27733 (22) International Filing Date: 22 November 1999 (22.11.99) (30) Priority Data: 09/215,866 18 December 1998 (18.12.98) US (71) Applicant: KIMBERLY-CLARK WORLDWIDE, INC. [US/US]; 401 North Lake Street, Neenah, WI 54956 (US). (72) Inventors: DATTA, Paul, Joseph; N2005 Mayflower Drive, Appleton, WI 54915 (US). SCHMOKER, Suzanne, Marie; 4212 Brooks Road, Oshkosh, WI 54904 (US). FLETCHER, Amy, Lynn; 4300 North Woodridge Drive, Appleton, WI 54915 (US). (74) Agent: BELVIS, Glen, P.; Brinks Hofer Gilson & Lione, P.O. Box 10087, Chicago, IL 60610 (US). | | (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i> |
| (54) Title: REFASTENABLE AND ADJUSTABLE PANT (57) Abstract An adjustable garment is provided for varying uses with infants, toddlers and adults to contain bodily fluids and the like. The garment employs a large elastic side panel. | | |

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | ML | Mali | TR | Turkey |
| BG | Bulgaria | HU | Hungary | MN | Mongolia | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MR | Mauritania | UA | Ukraine |
| BR | Brazil | IL | Israel | MW | Malawi | UG | Uganda |
| BY | Belarus | IS | Iceland | MX | Mexico | US | United States of America |
| CA | Canada | IT | Italy | NE | Niger | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NL | Netherlands | VN | Viet Nam |
| CG | Congo | KE | Kenya | NO | Norway | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NZ | New Zealand | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | PL | Poland | | |
| CM | Cameroon | KR | Republic of Korea | PT | Portugal | | |
| CN | China | KZ | Kazakhstan | RO | Romania | | |
| CU | Cuba | LC | Saint Lucia | RU | Russian Federation | | |
| CZ | Czech Republic | LI | Liechtenstein | SD | Sudan | | |
| DE | Germany | LK | Sri Lanka | SE | Sweden | | |
| DK | Denmark | LR | Liberia | SG | Singapore | | |
| EE | Estonia | | | | | | |

Refastenable and Adjustable Pant

BACKGROUND OF THE INVENTION

The field of disposable apparel for holding bodily fluids, such as incontinence type products is well established. There are a wide variety of products in this field, which have many uses including uses for adults, children and women. Some of these product types include those disclosed in Van Gompel et al. U.S. Patent No. 4,940,464, Strohbeen et al. U.S. Patent No. 4,610,681, Heran et al., U.S. Patent No. 4,646,362, and Enloe U.S. Patent No. 4,895,568.

It has long been a desire to have products that have the ability to contain large amounts of bodily fluids and material, i.e., urine, fecal material and menses, but at the same time resembled traditional undergarments or clothing. Similarly, it has long been a desire to have products that avoid or reduce any leakage of such material but at the same time fit comfortably. It has also long been a desire to obtain products that can easily be placed on the user and removed from the user when soiled. At times these interests compete against one another and sacrifice of one desirable quality had to be made in order to enhance another.

SUMMARY OF THE INVENTION

In an embodiment of invention there is provided a pant comprising a chassis, and elastic side panels; the pant having a front and back end; the chassis comprising an absorbent core, an outer liner and a bodyside liner; the chassis having a length and a width and a front and a back end; the elastic side panels having a width and a length; the elastic side panels adjacent the chassis and toward the back end of the chassis; the width of an elastic side panel being at least about equal to 30% of the width of the back of the chassis.

This pant may further have the elastic side panels comprise a means for fastening the panels to the chassis. The elastic side panels may further comprise at least three closure devices; and the chassis further comprises a front fastening panel. This pant may further have cuffs and a waist band. The elastic side panels may further comprise elastic elements; the elastic elements positioned generally transverse to the length of the side panel; the side panel further comprising at least two attached zones of elastic. The elastic side panels may also have at least two

closure devices, the closure devices providing a means to adjust the tension placed in the pant so that the leg tension and waist tension may be independently adjusted.

In another embodiment of the invention there is provided an incontinence product for adults capable of fitting an individual having a hip size from about 30 inches (762 mm) to about 43 inches (1092 mm) comprising: refastenable elastic side panels; the side panels having a length and a width; the incontinence product having a length and a width, the length of the elastic side panel being at about least 3 inches (76 mm) and the width of the elastic side panel being at least about 7 inches (178 mm) 8 inches (203 mm) or 9 inches (229 mm). The elastic side panels may further comprise means for fastening the panels. The elastic side panels may also further comprise at least three closure devices; and the product further comprises a front fastening panel. This product may further comprise cuffs. This product may further comprise a waist band. The elastic side panels may further comprise elastic elements; the elastic elements positioned generally transverse to the length of the side panel; the side panel further comprising at least two attached zones of elastic.

In yet another embodiment there is provided an incontinence product for adults capable of fitting an individual having a hip size from about 40 inches (1016 mm) to about 57 inches (1448 mm) comprising: refastenable elastic side panels; the side panels having a length and a width; the incontinence product having a length and a width, the length of the elastic side panel being at least 3 inches (76 mm) and the width of the elastic side panel being at least about 7 inches (178 mm).

In still another embodiment there is provided a fastenable pant comprising: an outer liner; an inner liner; and elastic side panels; the pant having a front and a back end, and a length and a width; and the total width of the elastic side panels making up at least about 60% of the width of the back of the pant. This pant may further comprise means for releasably fastening the elastic side panels; the front of the pant further comprising means for receiving the releasably fastening means of the elastic side panels. This pant may further comprise hook and loop closure devices. This pant may further comprise cuffs. This pant may further comprise a waist band. The elastic elements may be positioned generally transverse to the

length of the side panel; the side panel further comprising at least two attached zones of elastic.

In a further embodiment there is provided a pant comprising: a chassis; an elastic side panel; and a front panel; the pant having a front and a back end and a length and width; the front panel having a length and a width; the elastic side panel having a length and a width; the chassis comprising a bodyside liner, a surge layer, an absorbent core, a porous core wrap, and an outer liner; the outer liner and the bodyside liner encompassing the surge, wrap, and absorbent core; the chassis further comprising cuffs, crotch elastic and a waist band; the elastic side panels being located adjacent the chassis and fixed to the chassis; the total width of the elastic side panel being at least about equal to 50% of the width of the chassis; a closure device located on the elastic panel; a closure device located on the front panel; the closure device located on the front panel capable of adhering to the closure device located on the elastic panel. The elastic panel may be positioned adjacent the back end of the chassis.

In another embodiment there is provided an article of apparel for retaining bodily fluids comprising: a body having a length and a width; an absorbent core; an outer liner; a bodyside liner; an elastic side panel; the elastic side panel having a length and a width; the width of the elastic side panel being at least about 10% of the width of the body; the elastic side panel comprising elastic elements; the elastic elements running generally transverse to the length of the side panel; the side panel further comprising at least two attached zones of elastic, which zones run essentially in the length wise direction of the panel and which zones cross more than one elastic element.

In yet a further embodiment there is provided an article of apparel comprising an outer layer; an absorbent core; and an inner layer; the article further comprising elastic panels; the panels comprising elastic elements that run essentially around at least about 30% of the circumference of the body of the wearer when the article is in use; a plurality of attached elastic zones that extend essentially along the vertical axis of the body of the wearer when the article is worn; the attached zones being essentially evenly spaced apart and of about the same width; and the panels further comprising live elastic zones interspersed between the attached elastic zones.

In yet still another embodiment there is provided a garment comprising a backing member, a bodyside liner, an absorbent pad and an elastic panel; said garment having a width and a length; said elastic panel having a width and a length; whereby the width of the elastic panel is equal to the width of the garment.

- 5 In yet a further embodiment of this invention there is provided a product capable of fitting an individual having a hip size from about 4-10 inches (102-254 mm), 10-20 inches (254-508 mm), 20-26 inches (508-660 mm), or 27-39 inches (686-991 mm), comprising: refastenable elastic side panels; the side panels having a length and a width; the incontinence product having a length and a width, the
- 10 length of the elastic side panel being at least 1½ inches (38 mm) and the width of the elastic side panel being at least about 1½ inches (38 mm), ¾ (82.6 mm), 5 inches (127 mm) or 6½ (161 mm) respectively for the above waist sizes.

DRAWINGS

- Figure 1A is a plan view of a schematic representation of a pant showing
- 15 the bodyside of the pant.

Figure 1B is a plan view of a schematic representation of a pant showing the outside of the pant.

Figure 1C to 1E are cross sectional views of schematic representations of the pant shown in Figure 1A.

- 20 Figure 2 is a plan view of an embodiment of an elastic side panel.

Figure 3 is a plan view of a pant having an elastic waistband.

Figure 4A is a graph showing the shape of a embodiment of an elastic side panel.

Figure 4B is a plan view of an embodiment of an elastic side panel.

- 25 Figure 5 is a drawing of a pant being worn.

Figures 6A-6C are sketches of side panels.

Figures 7-10 are plan views of schematic representations of embodiments of the pant.

30 DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

A construction of one embodiment of a pant is generally shown in Figures 1A and 1B, with Figure 1A showing the bodyside or inside of the pant and

Figure 1B showing the outside of the pant. Referring to these figures, the pant consists of a body 1 having a front end 2, a back end 3, and a crotch area 17. The body has a chassis 4, a front fastening panel 5, and two elastic side panels 6 and 7. On each of the elastic side panels there are positioned closure devices 8 and 9 respectively. In this Figure, three such devices are shown for each side panel. Fewer or more closure devices may also be used. In the chassis, there may be positioned crotch elastics 10 and 11, an absorbent core or pad 12 and cuffs 13 and 14. On the bodyside of the chassis, there may be a bodyside liner sheet 15, which would cover the absorbent pad. On the outside of the absorbent pad, there may be a backing member or sheet 16, which covers the absorbent pad.

In use, the pant is positioned on the user and fastened by securing the closure devices 8 and 9 to the front fastening panel 5, as is shown in Figure 5. When the pant has been soiled, it is removed from the user and it can be folded into a convenient pouch by folding or rolling the front side 2 towards the back and by also folding or rolling one of the elastic side panels in. The remaining elastic side panel is then wide enough and has sufficient elasticity to encircle the entire rolled up configuration and close onto itself creating a convenient pouch for disposal.

The relationship of the size of the elastic panels, the chassis and the front fastening panel, as well as the number and position of the closure devices, provides the ability to have a single product conformably and securely fit a wide range of sizes, body shapes and age groups (e.g. infants, toddlers and adults). As discussed herein unless specifically mentioned otherwise, when referring to the dimensions and size of elasticized components of the pant, these dimensions and sizes will be for the actual size of the component, i.e., the maximum size under tension, and not for the size of the component when tension is relaxed, i.e., the smaller size as the elastics contract.

Generally, the total width (the sum of 18 and 19) of the elastic side panels 6 and 7 should be about 20% or more of the width 20 of the chassis 4. Optimally, the total width of the elastic side panels should be about 50% or more of the width of the chassis and ideally should range from about 75% to about 500% of the width of the chassis.

Generally, the width 21 of the fastening panel 5 should be less than about 5 times (2 times when extended) the total width (the sum of 18 and 19) of the relaxed elastic side panels. Optimally, the width of the fastening panel should be less than about 4 times (2 times when under tension) the total width of the relaxed elastic side panels. Ideally, the width of the fastening panel should be less than about 2 times the total width of the relaxed elastic side panels. Alternatively, an outer member may serve as the fastening panel.

Generally, the length 22 of the fastening panel is at least about 15% of the length of the pant and ideally the length of the fastening panel is at least about 20% of the length of the pant. Generally, the combined length of the elastic panels and the front fastening panel (the sum of 22 and 23) should be at least about 7% of the length of the total pant. Optimally, this combined length should be at least about 25% of the total pant and ideally this combined length should be from about 40% to about 60% of the length of the pant.

Generally, the width of the front and back ends of the chassis are the same. However, the chassis may be wider in front or back.

Generally, the optimal size relationship for the components of the pant are: for the width of the chassis and the front fastening panel to be about the same; for the width of the elastic side panels (the sum of 18 and 19) to be from about 100% to about 500% of the width of the chassis; for the pant to have three closure devices on each elastic panel; for the length of the front fastening panel to be from about 15% to about 30% of the total length of the pant and for the length of the elastic panels to be from about 15% to about 40% of the total length of the pant. This optimal size relationship may vary depending upon the elasticity of the side panels, their shape, their strength, and the shape and size of the chassis.

Cross sections of the pant are shown in Figure 1C, taken along line C-C of Figure 1A, Figure 1D, taken along line D-D of Figure 1A and Figure 1E, taken along line E-E of Figure 1A. Referring to these figures, the chassis 4 of the pant generally has an absorbent pad 12, which may be surrounded by a porous wrap 24. A surge layer 25 may also be positioned on the wrap. The pad and surge layers may be covered by the bodyside liner 15 and the backing member 16. The bodyside liner and backing member also cover the crotch elastics 10 and 11. Cuffs 13 and 14 are positioned on the bodyside liner of the pant and may have

elastics. The elastic side panels 6 and 7 are attached to the chassis and the closure devices 8 and 9 are attached to the elastic side panels. The front fastening panel 5 is attached to the outer surface of the chassis.

Generally, the elastic side panels can be attached to the chassis by any
5 suitable technique known to the art. The elastic side panels can be positioned between the backing member and the bodyside liner, on the bodyside of the bodyside liner or on the outside of the backing member. Optimally, they are positioned in-between the backing member and the bodyside liner. The elastic side panels and the chassis can overlap to greater or lessor extents depending
10 upon the overall size of the pant, the length of the elastic panel, the strength of the components, the type of attachment used (i.e., glue, ultrasonic, etc.) and the costs associated with those components. By way of illustration, if the elastic side panels are attached to the outside of the chassis, they could overlap the chassis by about 5% to about 25% or more of the chassis width. When the elastic side panels are
15 positioned between the bodyside liner and the backing member they should overlap these layers sufficiently for the manner of attachment to be effective. By way of illustration, and without any limitation on the size of the product, in a product for an adult having an overall width (the sum of 18, 19 and 20) of about 27 inches (686 mm), 36 inches in state under tension, 914 mm) and a chassis
20 width 20 of about 13 ½ inches (343 mm), the overlap should optimally be about from ¼ of an inch (6.4 mm) to about 1½ inches (38 mm).

The elastic side panels can be attached to the chassis by the use of adhesives, ultrasonic bonding, heat, pressure, or any other technique known to the art. Generally, any type of adhesive that can provide a strong bond can be used.
25 These would include by way of illustration hot melt adhesives, solvent-based adhesives, pressure sensitive adhesives, elastic attachment adhesives, and thermoset adhesives. Ideally, a hot melt adhesive may be used. By way of illustration, and with out any limitation on the types of adhesive that can be used, suitable hot melt adhesives can be obtained from: Ato-Findley Adhesives located
30 in Wauwatosa, Wisconsin under the trade names H-2525A or H2096; and National Starch & Chemical Corporation located in Bridgewater, New Jersey under the trade name 34-5610.

The adhesives may be applied through any number of techniques and in any number of patterns known to the art, which include by way of example and without limitation, spray, meltblown, slot coat, roll coat, gravure, spiral, rows, strips, or dots.

- 5 Ultrasonic bonding of the components can be accomplished by using any ultrasonic bonding device known to the art. Such devices can be obtained for example from Branson or Dukane. The pattern for the ultrasonic bond or weld should be such that it permits a good attachment of the components without adding unnecessarily to the stiffness of the pant, although as described herein in at
- 10 least one embodiment having some stiffness in these bonds is desirable. Such patterns include by way of example and without limitation, staggered dots, aligned dots, bars, crescents, or combinations of these. The pattern can be achieved either by plunge bonding or rotary ultrasonic bonding.

- Ideally, combinations of ultrasonic bonding and adhesives may be used.
- 15 When using such combinations, the width of the adhesive zone and the width of the ultrasonic zone may vary or be the same. That is, the width of the adhesive zone may be larger than the width of the ultrasonic zone, smaller than the width of the ultrasonic zone, or the same size. Thus, again turning to the above illustrative example of an adult 27 inch (686 mm) (36 inches under tension, 914 mm) width
- 20 product, and without any limitation, the adhesive zone would optimally coincide or be about ¼ inch (6.4 mm) narrower than the ultrasonic bonding zone.

- The closure devices may be attached to the elastic panels on the bodyside, on the outside, or if the elastic panels are of a multilayer construction, in-between the layers of the elastic panels. The closure devices may be adhered to the elastic
- 25 panels by any of the techniques and with any of the materials described herein for the attachment of one component to another, or by any other suitable fastening technique or material. Similarly, the amount of overlap between the elastic panels and the closure devices may vary. Additionally, some closure devices are equipped with adhesive on them and can thus be directly affixed to the elastic
- 30 panel without the need for an additional adhesive or gluing step. Continuing with the above illustration of a 27 inch (686 mm) (36 inches under tension, 914 mm) wide adult pant, by way of example and without limitation, the closure devices are attached to the outside of the panel, overlap the panel by about 1 inch (25 mm),

and are adhesively and ultrasonically bonded to the panel using a staggered dot pattern.

A front fastening panel may be attached onto the outside of the chassis. It may be the same size as the front section of the chassis, it may be smaller than the front section of the chassis, either width wise, length wise, or both, or it may be larger than the front section of the chassis. Optimally, the panel will be slightly smaller (about 1/16 of an inch (1.6 mm) to about 3 inches (76 mm)) in the width and length than the front section of the chassis. Moreover, the front panel may be any shape. The front panel may be adhered to the chassis by any techniques and materials described herein or by any other suitable fastening technique or material. Breathability of the pant may dictate the techniques or materials used when attaching the front panel to the chassis. Again, continuing with the example of a 27 inch (686 mm) (36 inches under tension, 914 mm) width pant, and without limitation, the front of the chassis would be about 13½ inches (343 mm) wide and the front fastening panel would be about 12½ inches (318 mm) wide.

The cuffs may be attached to the inside of the chassis by any of the techniques described herein or by another suitable fastening technique or material. The cuffs may be attached to the bodyside liner, the backing member, or some other layer of the chassis depending upon the width and position of these layers in the chassis. The cuffs may be positioned entirely over the absorbent pad, partially over the absorbent pad or entirely off the absorbent pad. Using the illustrative 27 inch (686 mm) (36 inches under tension, 914 mm) adult pant described above and without limitation, the cuffs would be located as shown in Figure 1A, adjacent the absorbent pad. Examples of cuffs that may be used are disclosed in Enloe, U.S. Patent No. 5,415,644, Enloe, U.S. Patent No. 5,413,570, Enloe et al., U.S. Patent No. 4,846,825, Enloe, U.S. Patent No. 4,846,823, Enloe U.S. Patent No. 4,704,116, Enloe U.S. Patent No. 5,599,338, Schleinz, U.S. Patent No. 5,649,918, Faulks WO 97/21410, and Le Maheiu et al., U.S. Patent No. 5,620,431, all of which are assigned to Kimberly-Clark and the disclosures of which are herein incorporated by reference.

The elastic side panel may be made from any material that has elastic properties. It may be single layer or have multiple layers. For example, it may be made from a multilayered material consisting of elastic filaments, fibers, sheets,

ribbon or strands sandwiched between two layers of fabric. It may be made from material such as by way of example, the types of materials disclosed in Wideman U.S. Patent No. 4,606,964 and Johnson U.S. Patent No. 3,371,668, the disclosures of which are herein incorporated by reference. It may be made from a
5 stretch bonded laminate type material, which consists of two layers of material and an elastomeric web that is melt blown or extruded as filaments between these two layers. It can also be a neck bonded type material or neck-bonded-laminate (NBL). The two layers can be, by way of example and without limitation, spunbonded material, such as spunbonded polypropylene, or they may be rayon
10 or a woven fabric type material, or film or apertured film. They may be breathable or non-breathable, although for use as elastic side panels it is preferable that the material be breathable. The elastomeric web may be made from Kraton®.

A further example of a type of material that may be used for the elastic side panels is known as "stretch bonded laminate" or SBL composite materials. These
15 materials generally have at least two layers in which one layer is a gatherable layer and the other layer is an elastic layer. The layers are joined together when the elastic layer is in an extended condition so that upon relaxing the layers, the gatherable layer is gathered. Such a multilayer composite elastic material may be stretched to the extent that the nonelastic material gathered between the bond
20 locations allow the elastic material to elongate. One type of multilayer composite elastic material is disclosed, for example, by U.S. Patent 4,720,415 to Vander Wielen et al., the disclosure of which is herein incorporated by reference, and in which multiple layers of the same polymer produced from multiple banks of extruders are used. Other composite elastic materials are disclosed in U.S.
25 Patent 4,789,699 to Kieffer et al., U.S. Patent 4,781,966 to Taylor and U.S. Patents 4,657,802 and 4,652,487 to Morman and 4,655,760 and 4,692,371 to Morman et al., the disclosure of which are herein incorporated by reference.

Examples of types of NBL materials that may be used for the elastic panels are described in U.S. Patent 5,226,992 issued July 13, 1993 to Morman; U.S.
30 Patent 5,336, 545 issued August 9, 1994 to Morman; and U.S. Patent 5,514,470 issued May 7, 1996 to Haffner et al., the disclosures of which are incorporated herein by reference.

An ideal material for the elastic side panels is a material that is breathable and consists of two layers of spunbonded polypropylene that have elastic filaments glued between them as shown in Figure 2. As shown in that Figure, the elastic side panel 7 has elastic filaments 26 that are glued between two layers of

5 spunbonded polypropylene. The elastic filaments extend in the width wise dimension 19 of the pant and panel. They are not parallel, but instead move closer together towards the end of the panel in what could be characterized as a zig-zag pattern. As shown in Figure 2, ideally the elastic filament should consist of a single

10 strands of elastic may be used, including parallel strands. The elastic filaments 26 are held in place between the layers of spunbonded by the use of adhesives and/or ultrasonics. The adhesive may be any of the types disclosed herein, or known to the art that has elastic properties when set, such adhesives would include, by way of example and without limitation, National Starch & Chemical

15 Company, Bridgewater, New Jersey, and Ato-Findley Adhesives, Wauwatosa, Wisconsin. The adhesives may be applied by any technique known to the art, including those described herein.

An optimal way to apply the adhesives to form the elastic side panels, and one which gives rise to a new and different elastic material is to use a slot coat

20 technique that provides for spaced apart parallel glue lines 27 that are positioned length wise (i.e., transverse to the widthwise dimension 19) on the panel and the pant. Additionally, the transverse gathers may be formed by the use of ultrasonic bonding, heat or pressure.

These glue lines may be from about 1/32 of an inch (0.8 mm) or smaller in

25 width to about 3½ inches (91 mm) in width or larger, and ideally range from about 1/8 inch (3.2 mm) in width to about 2 inches (51 mm) in width. The spacing between them may be the same as the width of the glue line or it may be different. Additionally, the glue lines may have varying widths. An ideal arrangement is for the glue lines to have a width of 1/8 inch (3.2 mm) and for the space between each

30 glue line to also be 1/8 inch (3.2 mm). This spacing creates a material that has transverse gathers or pleats. It has been found that these transverse gathers greatly improve the comfort and fit of the pant and panel as well as increase the elastic range of the panel. That is, panels constructed with these transverse

elastic gathers show a greater percentage elongation for the same tension and size of elastic filament than a panel that does not have these transverse elastic gathers. Depending on the type of adhesive and the amount used, the glue lines may result in attached zones in which the composite has reduced elasticity, regardless of the elasticity of the elastic, i.e., a zone of little or no elasticity in the panel. Alternatively, ultrasonic bond lines can replace the glue lines. These types of material are the subject of a separate patent application, which was filed on the same date as this application in the name of Fell et al., having lawyer identification number 659/489, which application is incorporated herein by reference.

10 The elastic panels made with these glue lines have a much higher maximum stretch than panels made by conventional techniques. For example, a panel made using 1/8 inch (3.2 mm) glue lines, spaced apart by 1/8 inch (3.2 mm) and having the elastic strands placed under 250% elongation will have a maximum elongation length of 240%. Under the same condition, it would be expected that
15 the conventional composition would have a maximum elongated length of about 212%. Thus, these elastic panels allow for a much greater use of the tension put into the strands and provides a panel that for the same initial elastic elongation can have a substantially larger maximum width.

Examples of materials suitable for constructing the elastic side panels
20 include elongatable materials, elastic materials, or elastomeric materials, such as polymer films, woven fabrics, knits, nonwoven fabrics or the like, as well as combinations thereof. Thus, the elastic side panels may be composed of a stretch-bonded-laminate (SBL) material, a neck-bonded-laminate (NBL) material, a reversibly necked nonwoven material, an elastomeric film, and elastomeric foam
25 material, elastic threads or the like. For example, suitable meltblown elastomeric fibrous webs for forming elastic side panels are described in U.S. Patent 4,663,220 issued May 5, 1987 to T. Wisneski et al., the disclosure of which is hereby incorporated by reference. Examples of composite fabrics comprising at least one layer of nonwoven textile fabric secured to a fibrous elastic layer are described in
30 European Patent Application EP No. 0 217 032 A2 published on April 8, 1987 with the inventors listed as J. Taylor et al., the disclosure of which is hereby incorporated by reference.

As described previously, the elastic side panels may be formed of a material capable of stretching in one direction or less desirably capable of stretching in multiple directions. One suitable one-directional stretch material is disclosed in U.S. Patent 4,782,415 issued January 19, 1988 to Vander Wielen et al., which is incorporated herein by reference. The one-directional stretch material may comprise a composite material including at least one gatherable web bonded to at least one elongated elastic web. The elastic web may be an elastic film or nonwoven fibrous elastic webs such as meltblown elastomeric fibrous webs. In one embodiment, the expansion panels comprise a stretch bonded laminate formed of a prestretched elastic meltblown inner layer sandwiched between and attached to a pair of spunbond polypropylene nonwoven webs having a basis weight of about 13.6 gsm (0.4 oz/yd²). Suitable elastic materials can be purchased from the Shell Chemical Company of Houston, Texas under the trade name KRATON.® Other suitable one-directional stretch materials are disclosed in U.S. Patents 4,965,112 issued October 23, 1990 to Morman; 4,606,964 issued August 19, 1986 to Wideman; and 4,657,802 issued April 14, 1987 to Morman.

Examples of two-directional stretch materials that could be used for the elastic side panels are disclosed in U.S. Patents 5,114,781 issued May 19, 1992 and 5,116,662 issued May 26, 1992 to Morman, which are incorporated herein by reference. A two-directional stretch material may comprise a composite material including a stretchable material and an elastic sheet, which may be formed by meltblowing or extrusion. Neckable materials are those which may be constricted in at least one dimension by applying a tensioning force in a direction perpendicular to the desired direction of neck-down, and may include a spunbonded, meltblown or bonded carded web. The tensioned, necked neckable material may be joined to the elongated elastic sheet at spaced locations arranged in a nonlinear configuration. Another two-directional stretch composite material may comprise one or more layers of reversibly necked material joined to one or more layers of elastic sheet at spaced locations. Reversibly necked materials are those that have been treated, such as with heat, while necked to impart memory to the material so that, when a force is applied to extend the material to its pre-necked dimensions, the treated, necked portions will generally recover to their necked dimensions upon termination of the force.

The elastic side panels may also be made of the type of material known as "stretch bonded," which typically refers to an elastic member being bonded to another member while the elastic member is extended at least about 25 percent of its relaxed length.

5 The components of the chassis may be held together by adhesives ultrasonic bonding, heat, pressure or another technique known to the art. The backing member should provide a liquid barrier and optimally should be breathable. It may also be covered with an additional layer or layers of material, an outer member (not shown in the Figures), to further enhance or change the
10 outside appearance, feel, or functionality of the outside of the pant. The absorbent pad is that portion of the pant that absorbs and retains liquids. It may be made of any absorbent material, such as that known to the art for use in diapers, adult incontinence products and feminine protection products, which would include porous fibrous matrices or foams. Super absorbent additives such as those made
15 by DOW (e.g. Dow 2035) and Favor (e.g. SXM880) may also be added to the pad. The thickness and absorbtivity of the pad may vary depending on product design and intended use from very thin to very thick, more specifically current pads may vary in thickness from about 1 mm to about 25 mm.

The pad may be shaped in any number of different configurations known to
20 the art. It may be hourglass shaped, rectangular, oval or it may be some other less regular shape, such as trapezoidal. The pad may extend length wise over the entire length of the chassis or it may be shorter. The pad may similarly extend the entire width of the chassis or it may be narrower. Additionally, the pad may have surface contours in it such as, for example and without limitation, a depression in
25 the center, multiple depressions or it may be embossed. In addition, the absorbent pad may comprise multiple layers of materials providing desired intake distribution and retention functionality's.

The pad may be covered by a porous wrap. For example, this porous wrap may be C-fold of tissue paper or other open material. Ideally, the porous wrap is
30 hydrophilic and has wet strength. By C-fold what is meant is that the material wraps, or is folded, around the pad but does not completely surround it, thus leaving the material in the shape of a C. The material may also, however, completely encompass the pad or be located on only the top and/or bottom of the

pad. The material may either be glued or not glued to the pad. Ideally, when tissue is used it is not glued or otherwise adhered to the pad.

The surge layer, which is optional, is placed on the bodyside of the pad. The surge layer may be adhered to the tissue, the pad, bodyside liner or any
5 combination thereof. Ideally, it is adhered to the tissue or pad.

The pad is held in place in the chassis by being affixed to the backing member, the bodyside liner, or both, or by the sandwiching effect of the backing member and bodyside liners, or both of these mechanisms. The bodyside liner may be any liquid permeable sheet. Optimally, the bodyside liner is a spunbonded
10 polypropylene. The bodyside liner may be adhered to the surge layer, or the tissue if there is no surge layer, or the pad if there is no surge layer and no tissue, by way of adhesives (which are well known to the art and some of which have been expressly identified herein). The adhesive may be applied by any of the ways known to the art, some of which have been described herein. The pad may
15 similarly be affixed to the backing member. The backing member may be any water resistive sheet. Optimally, the backing member will be a water impervious film that is also breathable. The backing member may be adhered to the pad. The backing member and the bodyside liner should be affixed to each other around the periphery of the pad.

20 Spunbonded fibers are typically small diameter fibers which are formed by extruding molten thermoplastic materials as filaments from a plurality of fine, usually circular capillaries of a spinneret with the diameter of the extruded filaments then being rapidly reduced as by, for example, in U.S. Patent 4,340,563 to Appel et al., and U.S. Patent 3,692,618 to Dorschner et al., U.S. Patent
25 3,802,817 to Matsuki et al., U.S. Patents 3,338,992 and 3,341,394 to Kinney, U.S. Patent 3,502,763 to Hartman, and U.S. Patent 3,542,615 to Dobo et al. Spunbond fibers are generally not tacky when they are deposited onto a collecting surface. Spunbond fibers are generally continuous and have average diameters (from a sample of at least 10) larger than 7 microns, more particularly, between about 10
30 and 20 microns.

Meltblown fibers are typically fibers of polymeric materials which are generally formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into converging

high velocity, usually hot, gas (e.g. air) streams which attenuate the filaments of molten thermoplastic material to reduce their diameter. Thereafter, the meltblown fibers can be carried by the high velocity gas stream and are deposited on a collecting surface to form a web of randomly dispersed meltblown fibers. Such a process is disclosed, for example, in U.S. patent 3,849,241 to Butin et al. Meltblown fibers may be continuous or discontinuous, are generally smaller than 10 microns in average diameter, and are generally tacky when deposited onto a collecting surface.

- Breathable members have a water vapor transmission rate (WVTR) that is equal to or greater than $500 \text{ g/m}^2/24 \text{ hours}$. Ideally, breathable members have WVTR of equal to or greater than $1000 \text{ g/m}^2/24 \text{ hours}$. Optimally, breathable members have WVTR of equal to or greater than $2000 \text{ g/m}^2/24 \text{ hours}$. Such materials may be used, for example as a backing member. Materials having a WVTR as high as $8,000 \text{ g/m}^2/24 \text{ hours}$ or greater may be used for side panels.
- The WVTR is calculated in accordance with ASTM Standard E96-95. Thus, circular samples measuring three inches in diameter are cut from each of the test materials and from a control, which is a piece of CELGARD™ 2500 film from Hoechst Celanese Corporation of Sommerville, New Jersey. CELGARD™ film is a microporous polypropylene film. Three samples are prepared for each material.
- The test dish is number 60-1 Vapometer pan distributed by Thwing-Albert Instrument Company of Philadelphia, Pennsylvania. One hundred milliliters of water is poured into each Vapometer pan and individual samples of the test materials and control materials are placed across the open tops of the individual pans. Screw-on flanges are tightened to form a seal along the edges of the pan, leaving the associated test material or control material exposed to the ambient atmosphere over a 6.5 centimeter diameter circle having an exposed area of approximately 33.17 square centimeters. The pans are placed in a forced air oven at 100°F (32 °C) or 1 hour to equilibrate. The oven is a constant temperature oven with external air circulating through it to prevent water vapor accumulation inside.
- A suitable forced air oven is, for example, a Blue M Power-O-Matic 60 oven distributed by Blue M. Electric Company of Blue Island, Illinois. Upon completion of the equilibration, the pans are removed from the oven, weighed and immediately returned to the oven. After 24 hours, the pans are removed from the oven and

weighed again. The preliminary test water vapor transmission rate values are calculated with Equation (I) below:

- (I) Test WVTR = (grams weight loss over 24 hours) x 315.5 g/m²/24 hours. The relative humidity within the oven is not specifically controlled.

5

Under the predetermined set conditions of 100°F (32°C) and ambient relative humidity, the WVTR for the CELGARD™ 2500 control has been defined to be 5000 grams per square meter for 24 hours. Accordingly, the control sample is run with each test and the preliminary test values are corrected to set conditions

10 using Equation (II) below:

- (II) WVTR = (Test WVTR/control WVTR) x (5000 g/m²/24 hours).

Further embodiments and constructions of the body absorbent pad and chassis components that may be used are as follows. These embodiments are provided as examples and are made without limitation.

15 The absorbent pad comprises materials adapted to absorb and retain urine, menses, blood, or other body excrement. The absorbent pad may comprise various natural or synthetic absorbent materials, such as cellulose fibers, surfactant treated meltblown fibers, wood pulp fibers, regenerated cellulose or cotton fibers, a blend of pulp and other fiber, or the like. The absorbent pad may
20 be of a generally rectangular shape and includes a peripheral edge comprised of side edges, a front end edge, and a back end edge. The absorbent pad has an exterior surface that faces away from the wearer, and an interior surface that faces towards the wearer.

The porous fibrous matrix of absorbent pad is preferably an air laid bat of
25 fluff and high absorbency material which may be formed in many ways, for example according to the teaching of Mazurak and Fries as set forth in U.S. Patent No. 4,381,782, the disclosure of which is incorporated herein by reference. The absorbent pad can comprise an airformed mixture of high absorbency material (SAP) and fibers, preferably of fluff pulp. Most preferably, the mixing of the fluff
30 fibers and the high absorbency material is homogenous. Alternatively, the mixtures can be layered, phased to place the high absorbency material in a specific machine direction location, or placed in a narrow band in the cross direction, or both. Also, the fibers can be made from fibers other than fluff pulp

such as chemically stiffened and thermomechanical pulps. In addition, the absorbent pad can comprise absorbent material other than air formed fluff and SAP. For example, coform materials as referenced in U.S. Patent Nos. 4,818,464 to Lau and 4,100,324 to Anderson can be used to make the absorbent pad as long
5 as they also contain high absorbency materials. In addition, wet formed composite materials comprising a combination of fibers and high absorbency materials as disclosed in U.S. Patent No. 5,651,862 to Anderson et al. can also be used. Stabilized airlaid materials comprising a mixture of fibers, binder fibers, and high absorbency materials which are bound together by latex binding or through air
10 bonding are also usable as absorbent materials. Additionally, any material known in the art that serves to absorb body exudates can be used to construct the absorbent pad.

The absorbent pad may comprise high absorbency materials which are typically hydrogel polymers that are desirably sufficiently cross-linked to render the
15 materials substantially water-insoluble. Cross-linking may, for example, be by irradiation or by covalent, ionic, van der Waals or hydrogen bonding. Suitable materials are available from various commercial vendors, such as Dow Chemical Company (Drytech 2035 LD), Stockhauser, Inc., Hoechst-Celanese Corporation and Allied-Colloid. Typically, the high-absorbency material is capable of absorbing
20 at least about 15 times its weight in water, and desirably is capable of absorbing more than about 25 times its weight in water. These high-absorbency materials may further include organic and inorganic materials. Organic high-absorbency materials can include natural materials, such as pectin, guar gum and peat moss, as well as synthetic materials, such as synthetic hydrogel polymers. Such
25 hydrogel polymers may include, for example, carboxymethylcellulose, alkali metal salts of polyacrylic acids, polyacrylamides, polyvinyl alcohol, ethylene maleic anhydride copolymers, polyvinyl ethers, hydroxypropyl cellulose, polyvinyl morpholinone, polymers and copolymers of vinyl sulfonic acid, polyacrylates, polyacrylamides, polyvinyl pyridine or the like. Other suitable polymers can include
30 hydrolyzed acrylonitrile grafted starch, acrylic acid grafted starch, and isobutylene maleic anhydride copolymers, and mixtures thereof. Suitable high-absorbency materials are described in U.S. Patent Nos. 4,699,823 issued October 13, 1987 to

Kellenberger et al. and 5,147,343 issued September 15, 1992 to Kellenberger, which are incorporated herein by reference.

- The high-absorbency material can be distributed or otherwise incorporated into the absorbent pad employing various techniques. The high-absorbency
- 5 material can be substantially uniformly distributed among the fibers comprising the absorbent pad. The materials can also be non-uniformly distributed within the fibers of the absorbent pad to form a generally continuous gradient with either an increasing or decreasing concentration of high-absorbency material, as determined by observing the concentration moving inward from the backing member.
- 10 Alternatively, the high-absorbency material can comprise a discrete layer separate from the fibers of the absorbent pad, or can comprise a discrete layer integral with the absorbent pad.

- The absorbent pad may also include a porous wrap or wrap layer to help maintain the integrity of the fibrous absorbent pad. This wrap layer may comprise
- 15 a cellulosic tissue or spunbond, meltblown or bonded-carded web material composed of synthetic polymer filaments, such as polypropylene, polyethylene, polyesters or the like or the like or natural polymer filaments such as rayon or cotton.

- The absorbent pad may have an aqueous liquid capacity great enough to
- 20 absorb discharges from about 10 grams or less to about 1500 grams or more. The absorbent pad may have a thickness less than about 25 mm, thus providing a non-bulky and flexible fit. For an adult incontinence product, the capacity of the absorbent pad should have a total capacity of about 200 grams to about 1300 grams. The absorbent pad may have a total capacity of at least about 300 grams
- 25 and not more than about 1200 grams. Further, the total capacity of the absorbent pad may be from about 400 grams to about 800 grams.

- The total capacity of the absorbent pad is determined using the absorbent pad, the bodyside liner, the backing member or outer liner, and the outer member. The saturated retention capacity is a measure of the total absorbent capacity of an
- 30 absorbent garment. The saturated retention capacity is determined as follows. The absorbent garment to be tested, having a moisture content of less than about 7 weight percent, is weighed and submerged in an excess quantity of the room temperature (about 23° C) saline solution described below. The material is

allowed to remain submerged for 20 minutes. After 20 minutes the absorbent garment is removed from the saline solution and placed on a Teflon™ coated fiberglass screen having 0.25 inch openings (commercially available from Taconic Plastics Inc., Petersburg, N.Y.) which, in turn, is placed on a vacuum box and
5 covered with a flexible rubber dam material. A vacuum of 3.5 kilopascals (0.5 pounds per square inch) is drawn in the vacuum box for a period of 5 minutes. The absorbent garment is weighed again. The amount of aqueous liquid retained by the material being tested is determined by subtracting the dry weight of the absorbent garment from the wet weight of the absorbent garment (after application
10 of the vacuum) and is reported as the saturated retention capacity in grams of aqueous liquid retained.

The saline solution is an aqueous solution of about 0.9 percent sodium chloride by weight. A suitable product is S/P™ Certified Blood Saline commercially available from Baxter Diagnostics in McGaw Park, Illinois.

15 The absorbent pad may also include tissue layers or acquisition or distribution layers to help maintain the integrity of fibrous absorbents or transport aqueous liquids. Thus, the body may also include additional components to assist in the acquisition, distribution, and storage of body exudates. For example, the body may include a transport layer, such as described in U.S. Patent No.
20 4,798,603 issued January 17, 1989 to Meyer et al., or a surge management layer, such as described in U.S. Patent No. 5,486,166 issued January 23, 1996 to Bishop et al., U.S. Patent No. 5,364,382 issued November 15, 1994 to Latimer et al., U.S. Patent No. 5,490,846 to Ellis et al., U.S. Patent No. 5,429,629 to Latimer et al., U.S. Patent No. 5,509,915 to Hanson et al., U.S. Patent No. 5,192,606 to Proxmire
25 et al., an European Patent Application EP 0 539 703 A1, published May 5, 1993, which the patents and application are incorporated herein by reference. Such layers are also referred to as acquisition/distribution or surge layers.

The acquisition/distribution layer is disposed on the aqueous liquid storage layer toward the body-facing surface of the absorbent pad to help decelerate and
30 diffuse surges of aqueous liquid that may be introduced into the absorbent pad. The acquisition/distribution layer may comprise a through-air bonded carded web composed of a blend of 40% 6 denier polyester fibers, commercially available from Hoechst Celanese Corporation, and 60% 3 denier polypropylene/polyethylene

sheath core bicomponent fibers, commercially available from the Chisso Corporation, with an overall basis weight ranging of from about 50 gsm and to about 120 gsm.

One suitable absorbent pad comprises an aqueous liquid storage layer in
5 which the basis weight of the absorbent components, such as fluff, pulp, and superabsorbent (SAP), are generally continuous throughout the MD length of the absorbent pad. The distribution of the absorbent components is substantially homogenous in at least the y-direction, preferably in the x- and y-directions and may be homogenous in the z-direction within the absorbent pad. The basis weight
10 of the absorbent pad can range between about 80 gsm and about 1,000 gsm. An acquisition layer is disposed on the aqueous liquid storage layer, which is typically moved forward on the aqueous liquid storage layer. The fluff pulp/SAP ratio can range from about 100:0 to about 40:60, and more typically from about 80:20 to about 50:50.

15 One suitable absorbent pad provides the feature of being able to transport aqueous liquid in what can be characterized in an x- and y-direction and in a z-direction. The transport of aqueous liquid in the z-direction is movement of a wicking nature and gravity flow where the aqueous liquid moves away from the body of the wearer. The transport of aqueous liquid in the x-direction and y-
20 direction is movement and/or wicking of aqueous liquid along the length and width of the absorbent pad. As can be appreciated, the movement of aqueous liquid both away from the wearer and along the length and width of the absorbent pad results in an increase in the utilization of the area of the absorbent pad since the aqueous liquid moves towards the distal ends of the absorbent pad, and the result
25 is an improvement of the absorption characteristics of the absorbent pad.

The backing member prevents aqueous liquid strike through to the outer clothing when discharge occurs onto the absorbent pad. The backing member is located on the inside of the outer member, if an outer member is used, and typically consists of an aqueous liquid impervious film such as polyethylene. The
30 aqueous liquid impervious backing member has an exterior surface that faces away from the wearer and an interior surface that faces toward the wearer. The backing member, acting as a barrier, should retard the movement of the aqueous liquid through the garment by making the backing member resistant to penetration

- normally encountered under wearing conditions. The backing member desirably comprises a material that is formed or treated to be aqueous liquid impervious. Alternatively, the backing member may comprise an aqueous liquid pervious material and other suitable means, such as an aqueous liquid impervious layer
- 5 associated with the absorbent pad may be provided to impede aqueous liquid movement away from the absorbent pad. The pant may be rendered aqueous liquid impervious by any method well known in the art such as coating the absorbent pad or by securing a separate aqueous liquid impervious material to the absorbent pad. The backing member may comprise a thin, aqueous liquid
- 10 impervious web or sheet of plastic film such as polyethylene, polypropylene, polyvinyl chloride or similar material. Other acceptable materials include a single spunbonded layer of the above types of materials, spunbonded-meltblown-spunbonded material. Suitable foam materials may also be used, as well as materials that are both aqueous liquid impervious and vapor-pervious.
- 15 Alternately, the backing member may comprise a nonwoven, fibrous web which has been suitably constructed and arranged to have low aqueous liquid perviousness. Still alternately, the backing member may comprise a layered or laminated material, such as a thermally bonded plastic film and nonwoven web composite. Alternatively, the backing member consists of an aqueous liquid
- 20 impervious film or foam which is pervious to water vapor under normal wearing conditions. The backing member may have a water vapor transmission rate of at least about 800 grams/m²/24 hours measured by ASTM E96-92. One example of a suitable film is a 39.4 grams per square meter microporous film produced by Mitsui and sold by Consolidated Thermoplastics (CT) under the trade name of
- 25 ESPOIR® N-TAF-CT.

The outer member may be compliant and soft feeling to the wearer. The outer member may be any soft, flexible, porous sheet which is aqueous liquid pervious, permitting aqueous liquids to readily penetrate into its thickness, or impervious, resistant to the penetration of aqueous liquids into its thickness. A

30 suitable outer member may be manufactured from a wide range of materials, such as natural fibers (e.g., wood or cotton fibers), synthetic fibers (e.g., polyester or polypropylene fibers) or from a combination of natural and synthetic fibers or reticulated foams and apertured plastic films.

There are a number of manufacturing techniques which may be used to manufacture the outer member. For example, the outer member may be woven or nonwoven web or sheet such as a spunbond, meltblown or bonded-carded web composed of synthetic polymer filaments, such as polypropylene, polyethylene, 5 polyesters or the like, or a web of natural polymer filaments such as rayon or cotton. The bonded-carded web may be thermally bonded or sprayed with a binder by means well known to those skilled in the fabric art. Suitably, the outer member is a nonwoven spunbond material and is available from Kimberly-Clark Corporation, located in Roswell, GA. The outer member has a weight from about 10 0.3 oz. per square yard (osy) (10.2 gsm) to about 2.0 osy (68 gsm) and typically about 0.6 osy (20.4 gsm). The outer member of the garment may be printed, colored or decoratively embossed. The outer member preferably has a pore size that readily allows the passage there through of air, sweat, and perspiration due to the breathability of the materiality. The outer member may be selectively 15 embossed or perforated with discrete slits or holes extending therethrough.

The pant may further include an aqueous liquid pervious bodyside liner that may be of approximately the same dimension as the back member and has an aqueous liquid peripheral edge comprising a front edge, a back edge, and side edges. The aqueous liquid pervious bodyside liner has an exterior surface that 20 faces away from the wearer and an interior surface that faces towards the wearer.

The bodyside liner consists of a nonwoven or other soft material for contacting the wearer's skin. The bodyside liner is compliant and soft feeling to the wearer. The bodyside liner may be any soft, flexible, porous sheet which is aqueous liquid pervious, permitting aqueous liquids to readily penetrate into its 25 thickness. A suitable bodyside liner may be manufactured from a wide range of materials, such as natural fibers (e.g., wood or cotton fibers), synthetic fibers (e.g., polyester or polypropylene fibers) or from a combination of natural and synthetic fibers or reticulated foams and apertured plastic films.

The bodyside liner is formed of an aqueous liquid pervious material so that 30 aqueous liquid waste, and possibly semi-solid waste as well, can pass through to the absorbent pad and be absorbed by the absorbent pad. A suitable bodyside liner may be comprised of a nonwoven web, a spunbond, meltblown or bonded-carded web composed of synthetic polymer filaments or fibers, such as

polypropylene, polyethylene, polyesters or the like, a perforated film, or a web or natural polymer filaments or fibers such as rayon or cotton. In addition, the bodyside liner may be treated with a surfactant to aid in aqueous liquid transfer. Suitably, the bodyside liner is a nonwoven spunbond. Suitably, the spunbond

5 material is available from Kimberly-Clark Corporation, located in Roswell, GA. The bodyside liner has a weight from about 0.3 oz. (10.2 gsm) per square yard (osy) to about 2.0 osy (68 gsm) and typically about 0.5 osy (17 gsm). The bodyside liner may be printed, colored or decoratively embossed. The bodyside liner can also be

10 a nonwoven web or sheet of polymeric fibers, such as polypropylene, polyester, polyethylene, rayon, chisso and the like. The bodyside liner may also be a plastic film with perforations, an expanded plastic webbing material or a scrim material. The bodyside liner has a pore size that readily allows the passage therethrough of air, sweat, and perspiration due to the breathability of the material. The bodyside liner may be selectively embossed or perforated with discrete slits or holes

15 extending therethrough.

Ideally, the fabric of the bodyside liner is surface treated with a surfactant such as that commercially available from Union Carbide Chemicals and Plastics Company, Inc., of Danbury, Connecticut, U.S.A., under the trade designation TRITON X-102. As used herein, the term "fabric" refers to all of the woven, knitted

20 and nonwoven fibrous webs. The term "nonwoven web" means a web of material that is formed without the aid of a textile weaving or knitting process.

As an alternate material, an aqueous liquid pervious bodyside liner can be made of a carded web of polyester fibers bonded to a spunbonded polypropylene or polyethylene carrier sheet. The carded material is made up of about 20 to about

25 60 weight percent polypropylene or polyethylene and about 80 to about 40 weight percent polyester. The basis weight of this material can be between about 30 gsm and about 70 gsm.

The crotch elastics are sandwiched in-between the backing member and bodyside liners. Alternatively, the crotch elastics may be sandwiched in between

30 the backing member and outer member. They may be held in place by adhesives, ultrasonic bonding, heat, pressure or any other technique known to the art for holding elastic in place. Optimally, by way of example and without limitation they may be held in place by an adhesive placed in a spiral pattern. The elastics may

be made from any material known in the art, such as LYCRA® from Dupont, Wilmington, Delaware or GLO SPAN from Globe Manufacturing Company, Fallriver, Massachusetts. The elastics may be in ribbon form, sheet form, string form, yarn form, or any other type. They may also be heat activated. Ideally, they

5 consist of 3 strands of LYRCA® having a decitex of about 940. Although 3 strands of crotch elastic are shown in the Figures, it is understood that more or less may be used. Further examples of the types of elastics and the manner in which they are affixed are provided in Heran et al. U.S. Patent No. 4,642,362, Strohbeen et al. U.S. Patent No. 4,610,681 and Ales et al. U.S. Patent No. 4,639,949, the

10 disclosures of which are herein incorporated by reference. Further, the crotch elastics may extend along the leg cut out and into the area of the back of the chassis. In this way, crotch elastics may extend to or past the point where the side panels are joined to the chassis.

Further embodiments and constructions of the crotch elastics are as follows.

15 These embodiments are provided as examples and are without limitation. In an embodiment, elastics are attached to the pant sandwiched between the backing member and the bodyside liner, in generally a stretched state by means known in the art, including ultrasonically bonded, heat/pressure bonded or adhesively bonded. The elastics are typically attached in a stretched state by means known

20 in the art, including ultrasonically bonded, heat/pressure bonded or adhesively bonded. Materials suitable for the elastics include a wide variety including but not limited to elastic strands, yarn rubber, flat rubber, elastic tape, film-type rubber, polyurethane and elastomeric, tape-like elastomeric or foam polyurethane or formed elastic or non-elastic scrim. Suitable material is sold under the name

25 LYCRA® by the DuPont Company located in Wilmington, Delaware. Each elastic may be unitary, multi-part or composite in construction before integrating into the garment.

In an alternative embodiment, elastics are attached to the garment sandwiched between the outer member and the backing member in generally a

30 stretched state by means known in the art, such as ultrasonically bonded, heat/pressure bonded or adhesively bonded.

The elastics may be from about 0.0625 inch (1.6 mm) to about 1 inch (25 mm) wide, more typically from about 0.25 inch (6 mm) to about 1 inch (25 mm),

and most typically from about 0.25 inch (6 mm) to about 0.75 inch (18 mm) such as 0.5 inch (13 mm). The elastics are applied under an elongation of from about 100% to about 350%, more typically under an elongation of from about 150% to about 275%, and most typically under an elongation of from about 225% to about 5 275%.

The elastics may comprise threads, strands, ribbons, bands, film, elastic nonwovens, or composite. The threads, strands, ribbons, or bands may be multiple and may be applied as a composite. The number of pieces of elastic material comprising the elastic ranges from about 1 to about 6, more typically from 10 about 2 to about 5, and most typically from about 3 to about 4. Preferably, when the elastics are threads, 1 to 6 threads are used as the leg elastics, and the threads are spaced from about 0.0625 inch (1.6 mm) to about 0.5 inches (13 mm), more preferably from about 0.0625 inch (1.6 mm) to about 0.25 inch (6 mm), and most preferably about 0.125 inch (3 mm) apart.

15 The threads may be made of any suitable elastomeric material. One suitable material is spandex such as LYCRA® threads available from DuPont located in Wilmington, Delaware. Suitable elastics include threads having a decitex (g/10000m) of from about 470 to about 1200, more typically from about 620 to about 1000, and most typically from about 740 to about 940 for elastics 20 comprising from about 3 to about 6 threads. Adhesive, typically applied in a meltblown or swirl pattern using currently known technology, is used to bond the elastics to the outer member, the bodyside liner or the backing member. Preferably the adhesive is applied only to the elastics. A suitable adhesive includes, for example, Findley H2096 hot melt adhesive which is available from Ato 25 Findley Adhesives located in Milwaukee, Wisconsin.

The cuffs may be made from any of the types of material that the bodyside liner or outer liner are made from or they may be made from some other type of material. The cuffs may be adhered to the bodyside liner by adhesives, ultrasonic bonding, heat, pressure or any of the other bonding techniques know to the art, of 30 which many are disclosed herein. The cuffs may be formed from the bodyside liner. The cuffs may have elastic in them on either or both the bodyside of the cuff, the side of the cuff that is adhered to the liner, the center of the cuff or on any other locations. The elastics may run the length of the cuff and the pant or they may be

shorter. The cuffs may be the entire length of the chassis or they may be shorter. They may run in a straight line, as shown in Figure 1, or they may be curved either to follow the contour of the leg cut out shape or to not follow that contour. They may be the same length, longer, or shorter than the length of the core. Ideally, the
5 cuffs are straight, made from the same material as the bodyside liner, have elastics in them that are positioned adjacent the bodyside, i.e., away from the points where they are bonded to the liner and that run the entire length of the cuff, and extend length wise to just beyond the ends of the core.

The bodyside liner, the outer liner, and the cuff material, as well as any
10 other materials in the pant may be embossed or otherwise patterned by ultrasonics, pressure, or heat.

An elastic waistband may optionally be incorporated into the pant at the front end, at the back end, or at both ends. The elastic waist band may be made from any elastic material known to the art, such as for example a composite of
15 spunbonded polypropylene and elastic strands. Ideally, as shown in Figure 3, the waistband 28 is included in the back section of the chassis and is made from the same type of material as the elastic side panels, although other types of elastized materials may also be used. The waistband may be positioned on or between any of the layers of the chassis. The waistband may be held in place in the pant by
20 any of the techniques known to the art, many of which have been disclosed herein.

The front fastening panel may be made from any material that has a surface that will adhere to the surface of the closure devices. Such closure devices are well known to the art and may include by way of example and without limitations, mechanical fasteners; adhesive tapes; adhesive tabs; buttons; ties; Velcro®;
25 hooks; clips; snaps; hook and loop; bottom and loop; interlocking hook; hook and hook type devices. A preferred material for the front fastening panel and one that is readily refastenable to hook closure devices is the material described in the co-pending Stokes U.S. patent application no. 754,419, filed December 16, 1996, which is assigned to Kimberly-Clark, and which is incorporated herein by
30 reference.

The general configuration of this pant provides for many variations and alternative embodiments, which gives rise to many variations and alternatives in the wearing, use and fit of the pant.

The entire outer edge of one or both of the elastic panels, i.e., the edge to which the closure devices are attached, may be stiffened. This stiffening may be accomplished by any method known to the art, such as by ultrasonics, heat, glue or the use of additional material. This stiffened portion would have reduced
5 elasticity or be non-elastic. A pant with the stiffened outer panel edge conforms to the fastening panel and lies flat against the body and prevents gapping between the closure devices on the panels.

One of the many shapes for the side panels, which is shown and described in Figures 4A and 4B, forms a bucket at the seam between the panel and the
10 chassis, which enhances the fit of the pant. This shape has the additional advantage of saving on material costs. Because the panels can be nested together during the manufacturing stage, they can be placed very closely to each other before being cut out thus reducing the amount of scrap material.

The stretch range for the elastic panel is dependent on the size of the pant,
15 the type of sheet material being used, the type of elastics being used and the shape of the panel. For a panel of the general shape as shown in Figures 4A and 4B the stretch range for an adult product should generally be from about 75% to about 200%, optimally the range should be from about 100% to about 175%, and ideally the range should be from about 120% to about 150%.

20 The tension for the elastic panel is dependent on the size of the pant, the type of sheet material being used, the type of elastics being used and the shape of the panel. For a panel of the general shape as shown in Figures 4A and 4B the tension range for an adult product should generally be from about 400g to about 1000g, optimally the range should be from about 500g to about 900g, and ideally
25 the range should be from about 600g to about 800g. It is understood, however, that larger or smaller tensions and stretch ranges may be used or needed for different embodiments of the pant and for different uses of the pant.

The average peak tension that many of the elastic materials used in adult disposable products exhibit, is measured at approximately 83% of the stretch to
30 stop length. Most products are worn at less than 100% of stretch to stop point since the tension peaks near the stretch to stop point. The tension at the stretch to stop point is not realistic of what most users would experience since they would find the product too tight if the elastics were stretched to this point.

The average peak tension is also measured during the 8th cycle of stressing and relaxing the elastic material. Measurement during the 8th cycle increases the accuracy to measure what the user experiences over time by accounting for stress relaxation that may be inherent in the elastic material.

- 5 The procedure for measuring tension includes the following;
1. Install 10 pound load cell in Sintech
 2. Cut 20 samples 3" wide by 3" long
 3. Secure a sample in the jaws of an Sintech Tensile testing Apparatus from Sytech a division of MTS Systems Corp. Research Triangle, NC.
 - 10 4. Set the distance between the jaws to 2"
 5. Run the Sytech to 2000 grams to establish the stretch to stop length which is the final jaw spacing minus the initial jaw spacing, i.e., the distance between the jaws. Sample size is 10
 - 15 6. Multiply the average stretch to stop length by 0.83 to calculate the elongation length for the cycle test.
 7. Run the Sytech to the calculated elongation length and back to zero elongation length 8 times. Sample size is 10
 - 20 8. On the eighth cycle run the elongation out to 2000g of tension and generate a graph of the relaxation curve, i.e., the return cycle after the 8th elongation cycle.
 9. Draw two lines on the graph tangent to the curve. One line tangent to the initial elongation and one tangent to final. These portions of the graph are generally linear.
 - 25 10. At the intersection of the two lines the elongation is approximately 83% of the stretch to stop length. Read the tension at the intersection point. Average the 10 tension values. This average peak tension is the tension of the elastic material that customers will experience when searing the product.
 - 30 The bonds between the chassis and the panel may also be stiffened. Stiffening of this bond reduces the tendency for a pant to curl, thereby improves the fit of the garment. This bond may be stiffened by any technique known to the art including those described herein to stiffen the outer edge of the panels.

The pant may be worn in a "J" shape configuration, a "U" shaped configuration or other shapes that the user or caregiver desires. If the pant is fastened so that the side panels are flush with the upper edge of the chassis the pant in use will have the appearance and feel of a continuous waist band around the body. These different shapes will be readily apparent to the wearer or caregiver as the product is worn.

The shape of the side panels as well as the number and position of the closure devices may be varied. Examples of some such configurations are shown in Figures 6A through 6C. Optimally, at least two closure devices are needed, one near the waist (i.e., the back end) and one near the bottom (i.e., the leg opening) of each elastic panel. The same tension or different tensions can be developed around the waist and legs to fit different shapes of users. For example, the device closest to the leg opening, the lower device, may have a different configuration, for example longer, larger or a different shape than the device near the waist, so that it can be attached in an area other than where the leg and stomach meet.

Alternatively, the fastening panel can be shaped to achieve varied fit and tensions. For example, if the closure device fastens in on an area where the bending of the leg causes it to unfasten, the fastening zone may be shaped to eliminate this by removing some of the landing material from this area,

Adjustments may be made to the points of attachment for the closure devices to the front fastening panel to independently control the tension around the leg, hip and waist areas to better fit the user's needs. Thus, the tension around the waist can be made greater than the tension around the hips and legs, or the legs can be greater than the waist and hips or any other combination of these variables is achievable. Moreover, appropriately placed strips of material may also be used in place of a solid sheet of material to serve as a fastening panel.

Example 1. An adult incontinent product illustrated in Figure 7 is provided that is capable of fitting persons who have hip sizes of from about 30 inches (762 mm) to about 43 inches (1092 mm). By "capable of fitting" it is meant that the product will at least fit these sizes, but may also fit larger and smaller sizes. The product has a body 1 having a length of about 35 1/2 (902 mm) inches and a width of about 27 inches (686 mm). The product has two elastic panels having a width of about 7 1/2 inches (191 mm) and a length of about 6 3/4 inches (171 mm) for

the shorter side (the side to which the closure devices are attached.) Three closure devices 4 are attached to each side panel by ultrasonic bonding with a dot pattern 5 represented by cross hatching in the Figure. The ultrasonic bonding pattern runs the entire length of the panel. The closure devices are made from a hook type material that has a fastening tape and a finger tab. As shown in Figure 7, the closure devices are folded and attached to the elastic panels as would be seen in shipping. The elastic side panels are affixed to the chassis by ultrasonic bond, and adhesives at 6. The elastic panels have a strand of 940 decitex LYCRA® that is elongated to 250% and placed in a zig-zag type pattern between two layers of polypropylene spunbonded having a 0.6 osy (20.4 gsm). The panel has glue lines that are 1/8 inch (3.2 mm) in width and 1/8 inch (3.2 mm) apart. They are applied by slot coating using 15.5 gsm of Findley H-2525A adhesive. The product has an absorbent core 9, crotch elastics 7, cuffs 8 and a front fastening panel, and a waist band 10.

Example 2. An adult incontinent product of the general shape and configuration of the product shown in Figure 7 having the capability of fitting persons having a hip size of from about 44 inches (1118 mm) to about 60 inches (1524 mm) is provided. The product has length of about 35 1/2 inches (902 mm) and a width of about 34 1/2 inches (876 mm). The width of each elastic panel is about 15 inches (381 mm). The product is similar in all other aspects to the product of Example 1. This single panel can be viewed as having two portions, a left and right divided along the center line of the pant.

Example 3. A product is provided having a general configuration of the type shown in Figure 8. In this example, the elastic panels are joined together to form a single elastic panel 1 attached to the chassis. This single panel can be viewed as having two portions, a left and a right divided along the center line of the pant.

Example 4. A product is provided as illustrated in Figure 9. In this example, four elastic panels 1 are present. The width of these panels would be approximately half the width of the side panels used in an embodiment with two panels.

Example 5. A product is provided as illustrated in Figure 10. In this example, the width of one of the elastic panels 1 is greatly increased by about three times the width of the other panel.

Claims

1. A pant comprising a chassis, and elastic side panels; the pant having a front and back end; the chassis comprising an absorbent core, an outer liner and a bodyside liner; the chassis having a length and a width and a front and a back
5 end; the elastic side panels having a width and a length; the elastic side panels adjacent the chassis and toward the back end of the chassis; the width of an elastic side panel being at least about equal to 30% of the width of the back of the chassis.
2. The pant of claim 1 wherein the elastic side panels further comprise
10 a means for fastening the panels to the chassis.
3. The pant of claim 1 wherein the elastic side panels further comprise at least three closure devices; and the chassis further comprises a front fastening panel.
4. The pant of claim 1 further comprising cuffs.
- 15 5. The pant of claim 1 further comprising a waist band.
6. The pant of claim 1 wherein the elastic side panels further comprise elastic elements; the elastic elements positioned generally transverse to the length of the side panel; the side panel further comprising at least two attached zones of elastic.
- 20 7. The pant of claim 1 wherein the elastic side panels have at least two closure devices, the closure devices providing a means to adjust the tension in the pant in use so that the leg tension and waist tension may be independently adjusted.
8. An incontinence product for adults capable of fitting an individual
25 having a hip size from about 30 inches (762 mm) to about 43 inches (1092 mm) comprising: refastenable elastic side panels; the side panels having a length and a width; the incontinence product having a length and a width, the length of the

elastic side panel being at least about 3 inches (76 mm) and the width of the elastic side panel being at least about 7 inches (178 mm).

9. The product of claim 8 wherein the elastic side panels further comprise means for fastening the panels.
- 5 10. The product of claim 8 wherein the elastic side panels further comprising at least three closure devices; and the product further comprises a front fastening panel.
11. The product of claim 8 further comprising cuffs.
12. The product of claim 8 further comprising a waist band.
- 10 13. The product of claim 8 wherein the elastic side panels further comprising elastic elements; the elastic elements positioned generally transverse to the length of the side panel; the side panel further comprising at least two deadened zones of elastic.
14. The pant of claim 8 wherein the elastic side panels have at least two
- 15 15 closure devices, the closure devices providing a means to adjust the tension placed in the pant so that the leg tension and waist tension may be independently adjusted.
16. An incontinence product for adults capable of fitting an individual having a hip size from about 40 inches (1016 mm) to about 57 inches (1448 mm)
- 20 20 comprising: refastenable elastic side panels; the side panels having a length and a width; the incontinence product having a length and a width, the length of the elastic side panel being at least 3 inches (76 mm) and the width of the elastic side panel being at least about 7 inches (178 mm).
16. The product of claim 15 wherein the elastic side panels further
- 25 25 comprise means for fastening the panels.

17. The product of claim 15 wherein the elastic side panels further comprise at least three closure devices; and the product further comprises a front fastening panel.
18. The product of claim 15 further comprising cuffs.
- 5 19. The product of claim 15 further comprising a waist band.
20. The product of claim 15 wherein the elastic side panels further comprise elastic elements; the elastic elements positioned generally transverse to the length of the side panel; the side panel further comprising at least two deadened zones of elastic.
- 10 21. The pant of claim 15 wherein the elastic side panels have at least two closure devices, the closure devices providing a means to adjust the tension placed in the pant so that the leg tension and waist tension may be independently adjusted.
- 15 22. A fastenable pant comprising: an outer liner; an inner liner; and elastic side panels; the pant having a front and a back end, and a length and a width; and the total width of the elastic side panels making up at least about 60% of the width of the back of the pant.
- 20 23. The pant of claim 22 further comprising means for releasably fastening the elastic side panels; the front of the pant further comprising means for receiving the releasably fastening means of the elastic side panels.
24. The pant of claim 22 further comprising hook and loop closure devices.
25. The pant of claim 24 further comprising cuffs.
26. The pant of claim 25 further comprising a waist band.
- 25 27. The pant of claim 26 further comprising elastic elements positioned generally transverse to the length of the side panel; the side panel further comprising at least two attached zones of elastic.

28. A pant comprising: a chassis; an elastic side panel; and a front panel; the pant having a front and a back end and a length and width; the front panel having a length and a width; the elastic side panel having a length and a width; the chassis comprising a bodyside liner, a surge layer, an absorbent core, a porous
5 core wrap, and an outer liner; the outer liner and the bodyside liner encompassing the surge, wrap, and absorbent core; the chassis further comprising cuffs, crotch elastic and a waist band; the elastic side panels being located adjacent the chassis and fixed to the chassis; the total width of the elastic side panel being at least about equal to 50% of the width of the chassis; a closure device located on the
10 elastic panel; a closure device located on the front panel; the closure device located on the front panel capable of adhering to the closure device located on the elastic panel.

29. The pant of claim 28 wherein the elastic panel is positioned adjacent the back end of the chassis.

15 30. An article of apparel for retaining bodily fluids comprising: a body having a length and a width; an absorbent core; an outer liner; a bodyside liner; an elastic side panel; the elastic side panel having a length and a width; the width of the elastic side panel being at least about 10% of the width of the body; the elastic side panel comprising elastic elements; the elastic elements running generally
20 transverse to the length of the side panel; the side panel further comprising at least two attached zones of elastic, which zones run essentially in the length wise direction of the panel and which zones cross more than one elastic element.

31. The article of apparel of claim 30 wherein the elastic side panels further comprise means for fastening the panels to the body.

25 32. The article of apparel of claim 30 wherein the elastic side panels further comprise at least three closure devices; and the body further comprises a front fastening panel.


33. The article of apparel of claim 30 further comprising cuffs.

34. The article of apparel of claim 30 further comprising a waist band.

35. The article of apparel of claim 30 further comprising means for releasably fastening the elastic side panels; the body further comprising means for receiving the releasably fastening means of the elastic side panels.
36. The article of apparel of claim 30 further comprising hook and loop
5 closure devices.
37. The article of apparel of claim 36 further comprising cuffs.
38. The article of apparel of claim 37 further comprising a waist band.
39. An article of apparel comprising an outer layer; an absorbent core;
and an inner layer; the article further comprising elastic panels; the panels
10 comprising elastic elements that run essentially around at least about 30% of the
circumference of the body of the wearer when the article is in use; a plurality of
deadened elastic zones that extend essentially along the vertical axis of the body
of the wearer when the article is worn; the deadened zones being essentially
evenly spaced apart and of about the same width; and the panels further
15 comprising live elastic zones interspersed between the deadened elastic zones.
40. A garment comprising a backing member, a bodyside liner, an
absorbent pad and an elastic panel; said garment having a width and a length;
said elastic panel having a width and a length; whereby the width of the elastic
panel is equal to the width of the garment.
- 20 41. A product for children capable of fitting an individual having a hip size
from about 4 inches (102 mm) to about 10 inches (254 mm) comprising:
refastenable elastic side panels; the side panels having a length and a width; the
incontinence product having a length and a width, the length of the elastic side
panel being at least 1½ inches (38 mm) and the width of the elastic side panel
25 being at least about 1½ inches (38 mm).
42. A product for children capable of fitting an individual having a hip size
from about 10 inches (254 mm) to about 20 inches (508 mm) comprising:
refastenable elastic side panels; the side panels having a length and a width; the

incontinence product having a length and a width, the length of the elastic side panel being at least 1½ inches (38 mm) and the width of the elastic side panel being at least about 3¼ inches (82.6 mm).

43. A product capable of fitting an individual having a hip size from about 20 inches (508 mm) to about 26 inches (660 mm) comprising: refastenable elastic side panels; the side panels having a length and a width; the incontinence product having a length and a width, the length of the elastic side panel being at least 1½ inches (38 mm) and the width of the elastic side panel being at least about 5 inches (127 mm).
44. A product capable of fitting an individual having a hip size from about 27 inches (686 mm) to about 39 inches (991 mm) comprising: refastenable elastic side panels; the side panels having a length and a width; the incontinence product having a length and a width, the length of the elastic side panel being at least 1½ inches (38 mm) and the width of the elastic side panel being at least about 6½ inches (161 mm).

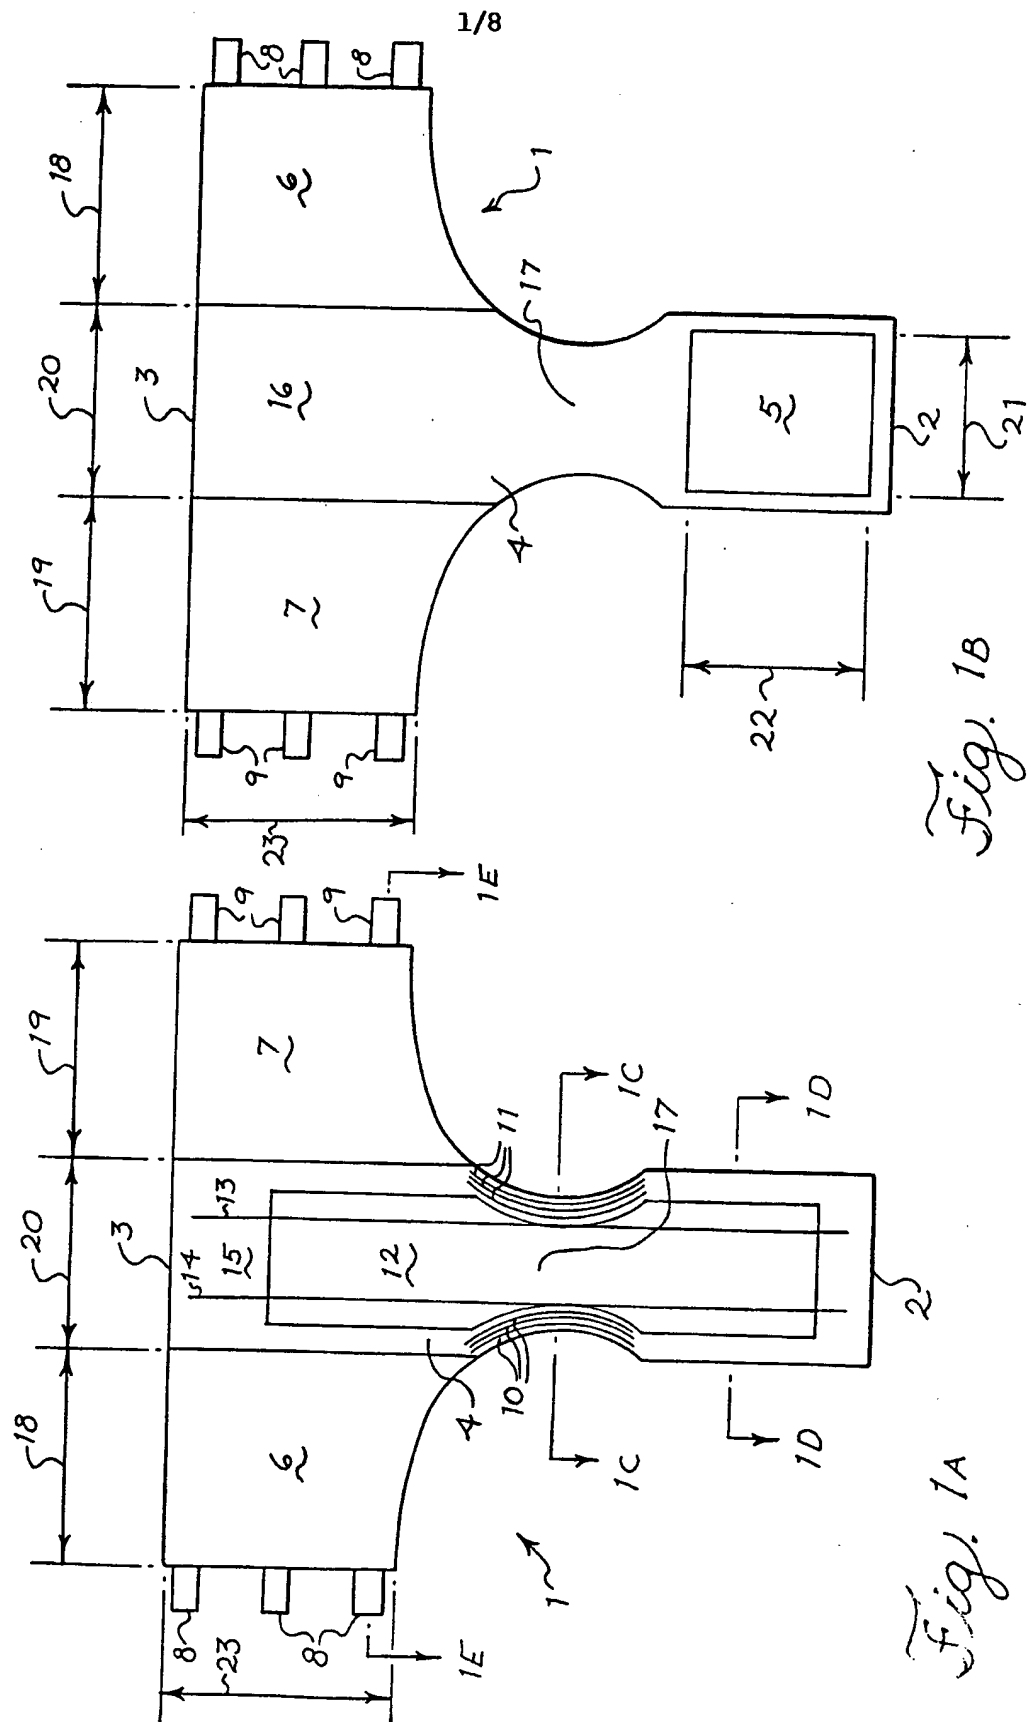

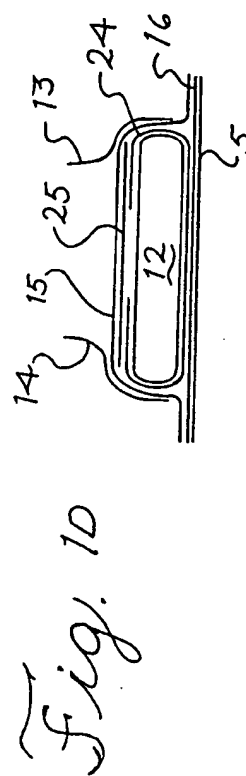
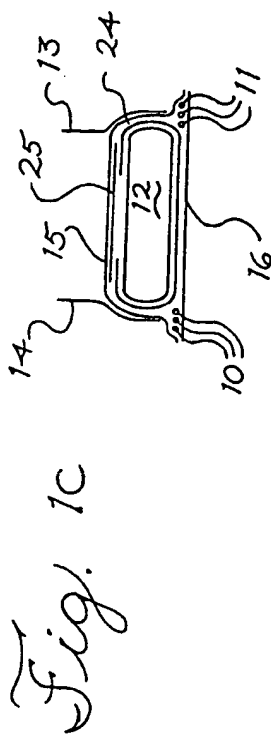
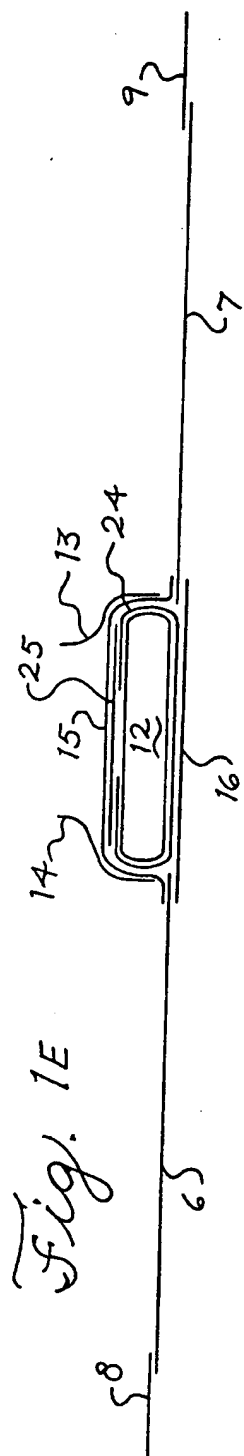


Fig. 3

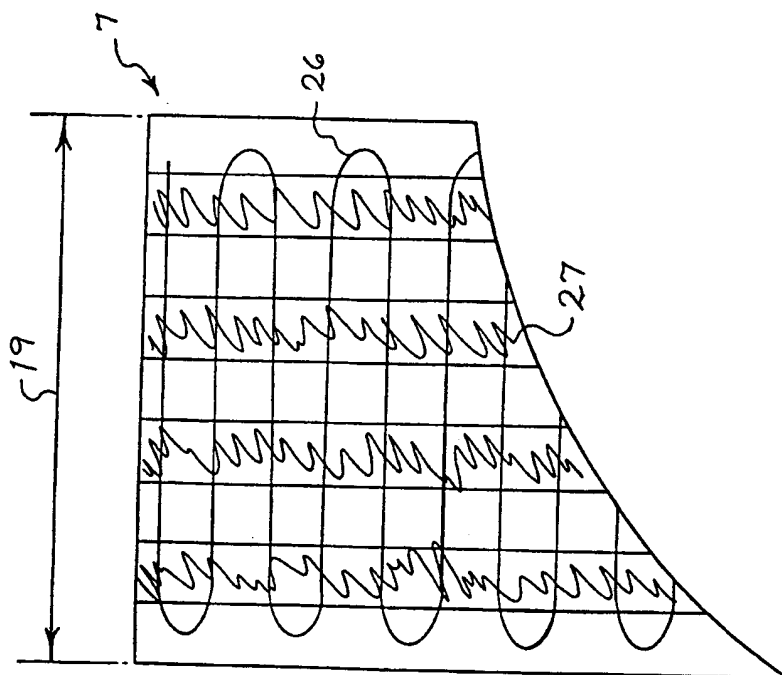
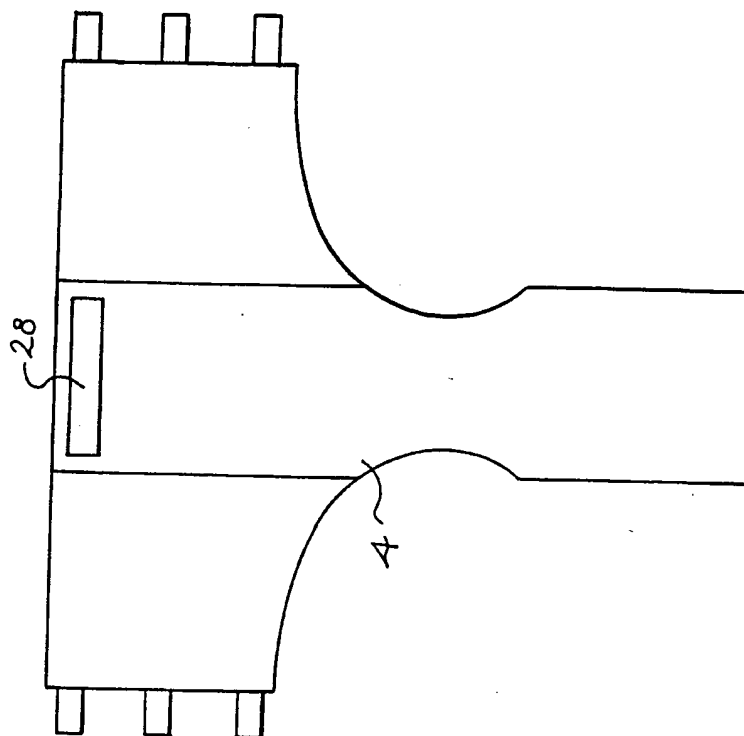


Fig. 2

4/8

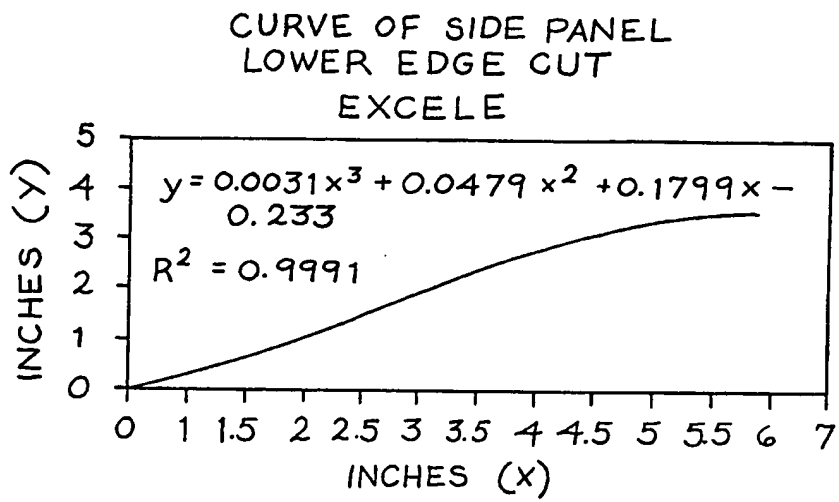
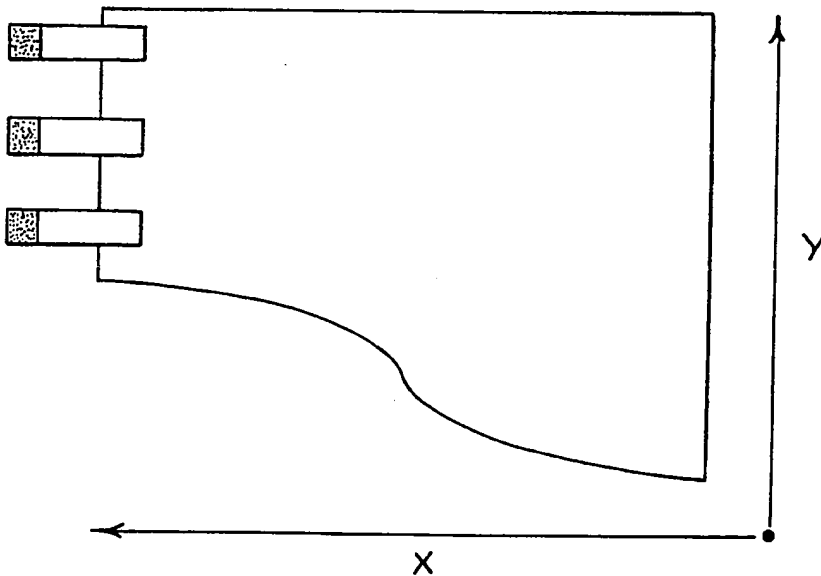
*Fig. 4A**Fig. 4B*

Fig. 7

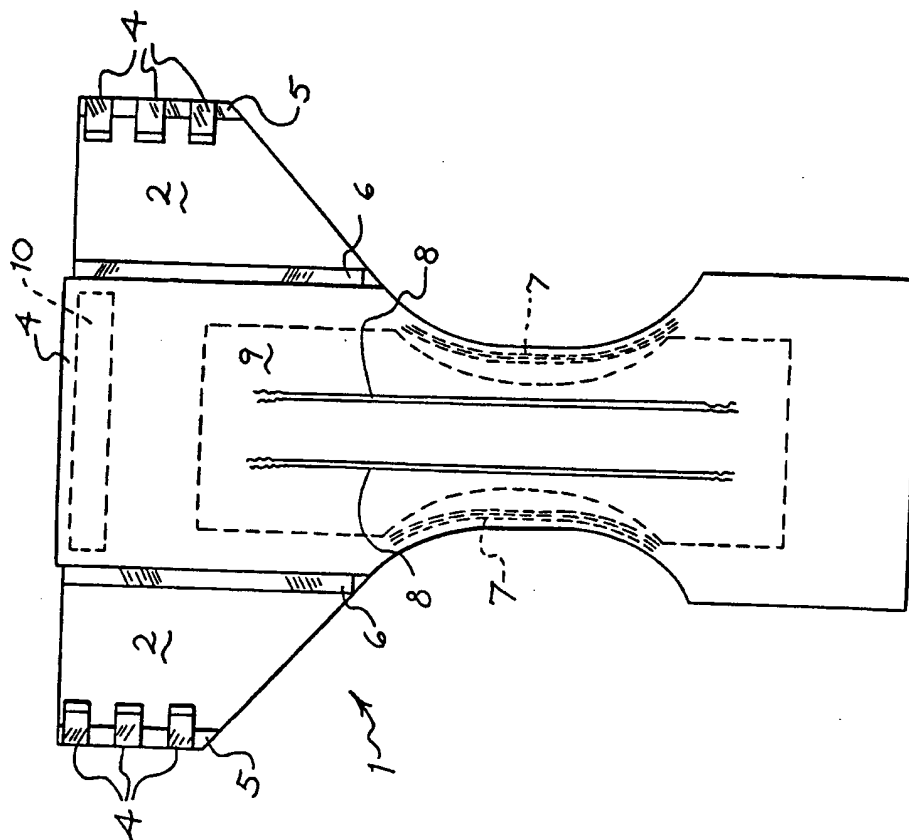


Fig. 5

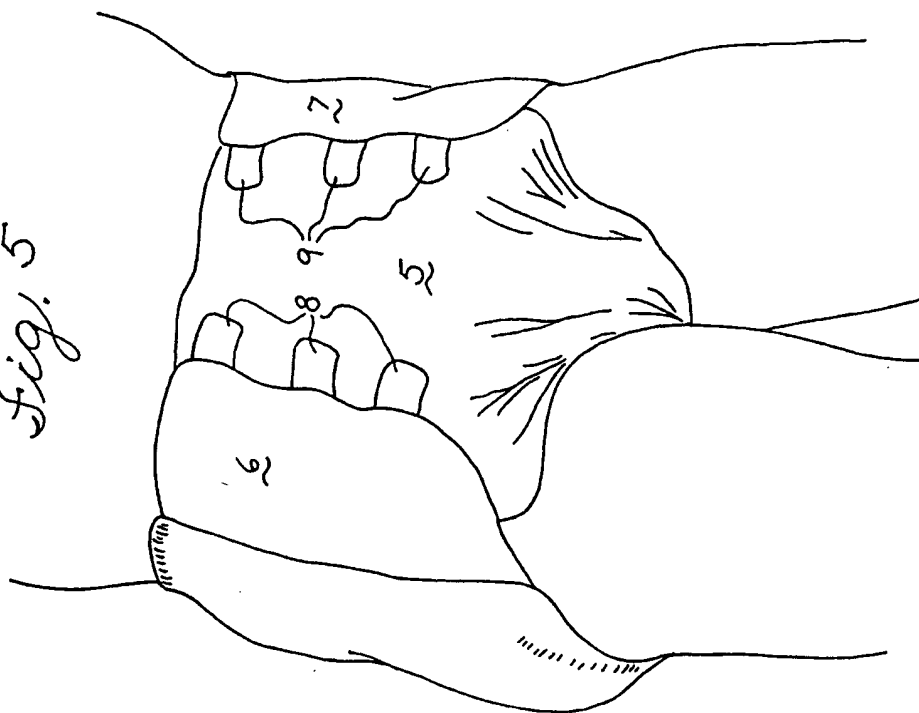


Fig. 6A

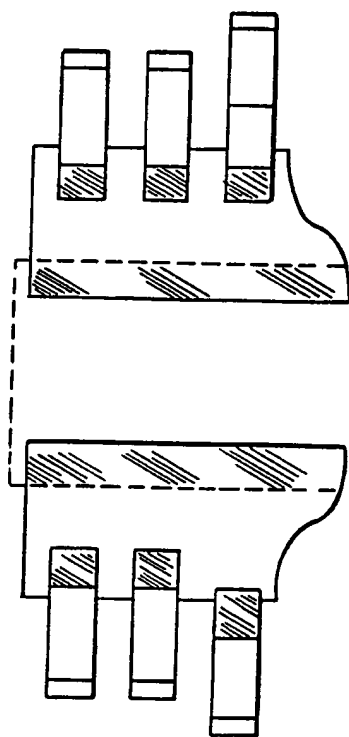


Fig. 6B





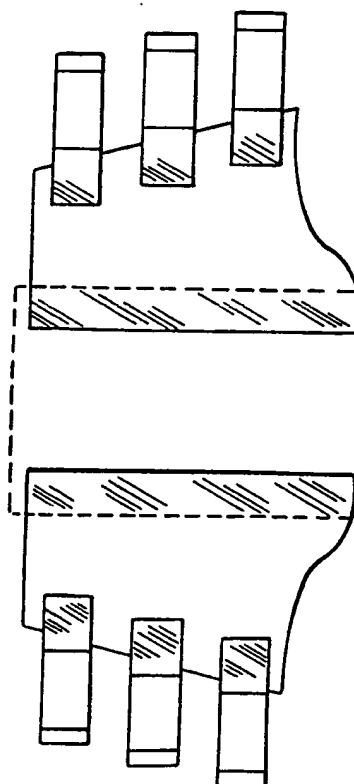


Fig. 6C

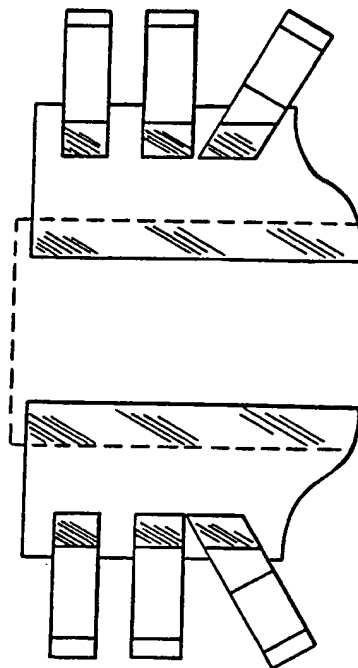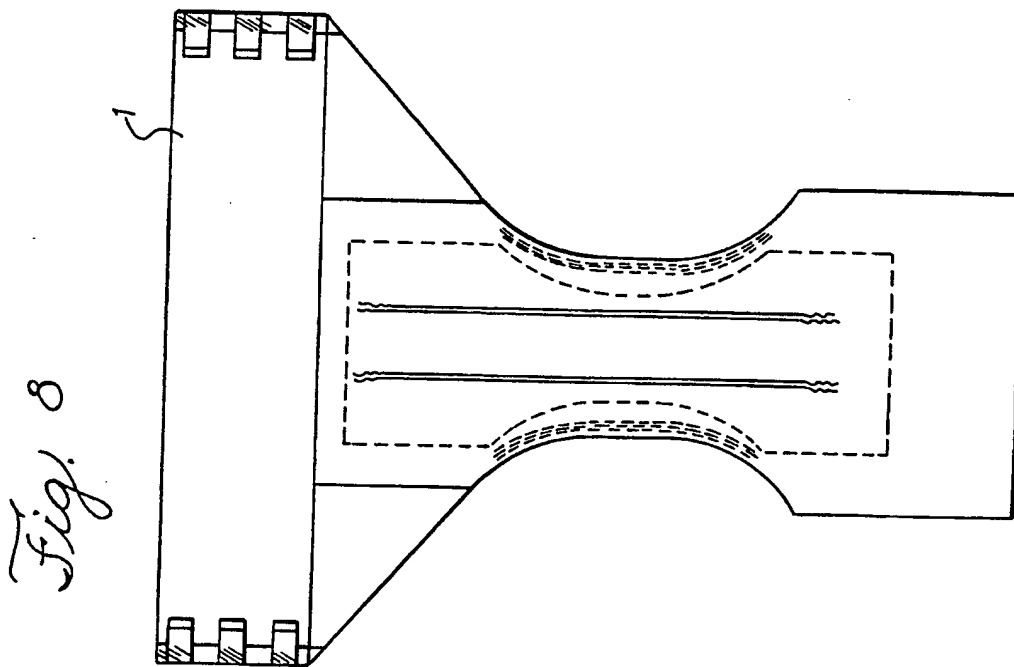

7/8

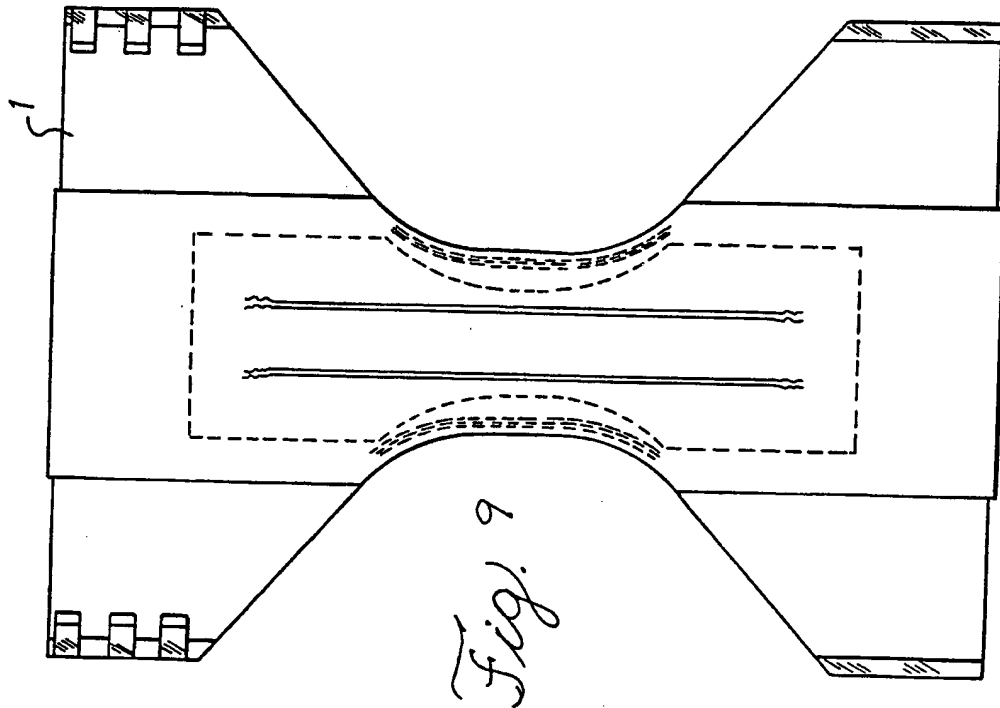

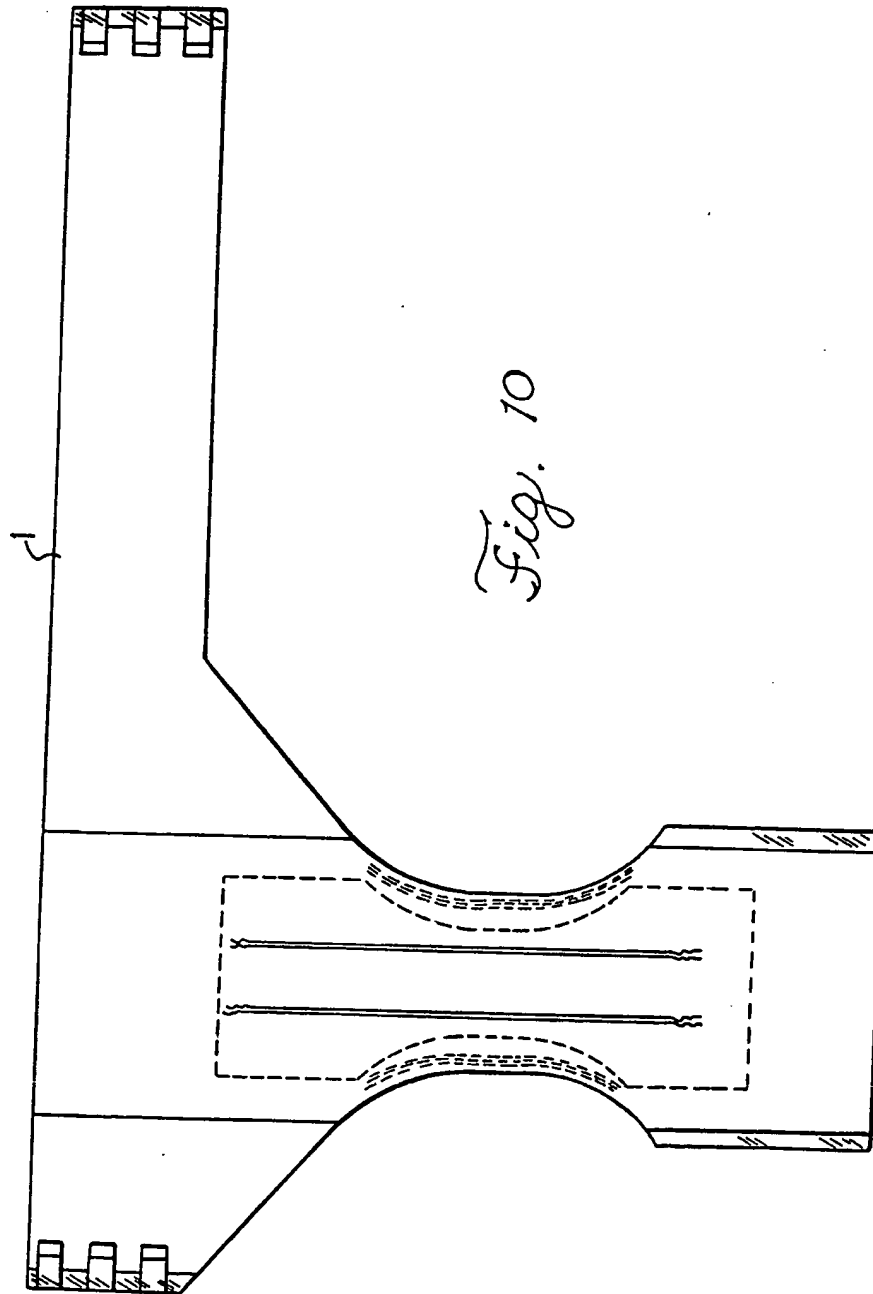




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|-----------|--|
| (51) International Patent Classification ⁷ : A61F 13/15 | A3 | (11) International Publication Number: WO 00/37005 (43) International Publication Date: 29 June 2000 (29.06.00) |
| (21) International Application Number: PCT/US99/27733 (22) International Filing Date: 22 November 1999 (22.11.99) (30) Priority Data: 09/215,866 18 December 1998 (18.12.98) US (71) Applicant: KIMBERLY-CLARK WORLDWIDE, INC. [US/US]; 401 North Lake Street, Neenah, WI 54956 (US). (72) Inventors: DATTA, Paul, Joseph; N2005 Mayflower Drive, Appleton, WI 54915 (US). SCHMOKER, Suzanne, Marie; 4212 Brooks Road, Oshkosh, WI 54904 (US). FLETCHER, Amy, Lynn; 4300 North Woodridge Drive, Appleton, WI 54915 (US). (74) Agent: BELVIS, Glen, P.; Brinks Hofer Gilson & Lione, P.O. Box 10087, Chicago, IL 60610 (US). | | (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims</i> <i>and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 3 August 2000 (03.08.00) |

(54) Title: REFASTENABLE AND ADJUSTABLE FASTENER SYSTEM FOR DIAPER**(57) Abstract**

An adjustable garment is provided for varying uses with infants, toddlers and adults to contain bodily fluids and the like. The garment employs a large elastic side panel. The pant comprising a chassis and elastic side panels; the pant having a front and back end; the chassis comprising an absorbent core, an outer liner and a bodyside liner; the chassis having a length and a width and a front and back end; the elastic side panels having a width and a length; the elastic side panels adjacent the chassis and toward the back end of the chassis; the width of an elastic side panel being at least about equal to 30 % of the width of the back of the chassis.

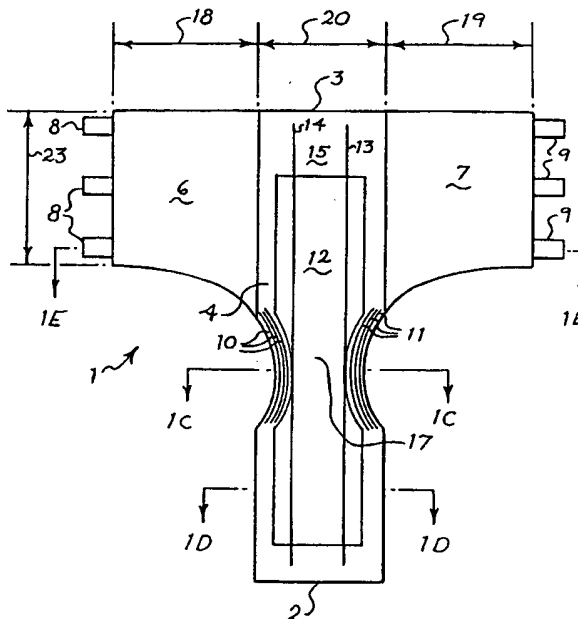

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | ML | Mali | TR | Turkey |
| BG | Bulgaria | HU | Hungary | MN | Mongolia | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MR | Mauritania | UA | Ukraine |
| BR | Brazil | IL | Israel | MW | Malawi | UG | Uganda |
| BY | Belarus | IS | Iceland | MX | Mexico | US | United States of America |
| CA | Canada | IT | Italy | NE | Niger | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NL | Netherlands | VN | Viet Nam |
| CG | Congo | KE | Kenya | NO | Norway | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NZ | New Zealand | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | PL | Poland | | |
| CM | Cameroon | KR | Republic of Korea | PT | Portugal | | |
| CN | China | KZ | Kazakstan | RO | Romania | | |
| CU | Cuba | LC | Saint Lucia | RU | Russian Federation | | |
| CZ | Czech Republic | LI | Liechtenstein | SD | Sudan | | |
| DE | Germany | LK | Sri Lanka | SE | Sweden | | |
| DK | Denmark | LR | Liberia | SG | Singapore | | |
| EE | Estonia | | | | | | |

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/27733

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F13/15

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|---|
| X | <p>US 5 370 634 A (ANDO KENJI ET AL) 6 December 1994 (1994-12-06)</p> <p>column 1, line 10 - line 12 column 4, line 11 - column 11, line 29 claims 1,3-6,9-11,13,14,17-19; figures 1-11</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-/--</p> | <p>1-12, 14-19, 21-23, 28-38, 40-44</p> |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

30 May 2000

Date of mailing of the international search report

16. 06. 2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Joly, F

INTERNATIONAL SEARCH REPORT

Int. l. Application No
PCT/US 99/27733

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|--|---|--|
| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| X | <p>EP 0 433 951 A (KIMBERLY CLARK CO) 26 June 1991 (1991-06-26)</p> <p>column 6, line 33 -column 7, line 14 column 12, line 16 - line 40 column 13, line 13 - line 24 claims 1,2,4,8,13,14,25; figures 2,4A,4B,5,6,7,8</p> <p style="text-align: center;">---</p> | <p>1,2,4-6, 8,11,12, 15,16, 18,19, 22-31, 33-38, 41-44</p> |
| X | <p>US 5 749 866 A (DREIER KIMBERLY ANN ET AL) 12 May 1998 (1998-05-12)</p> <p>column 2, line 25 - line 31 column 5, line 21 - line 67 column 7, line 33 - line 48 column 9, line 55 - line 57 column 10, line 33 - line 34 column 12, line 45 - line 50 column 14, line 19 -column 22, line 40 column 25, line 37 -column 29, line 12 column 33, line 17 - line 35 claims 1,9,10,16-19; figures 1-5C,16-24</p> <p style="text-align: center;">---</p> | <p>1,2,4-6, 22-31, 33-38, 40,41</p> |
| X | <p>US 5 695 488 A (SOSALLA PAULA MARY) 9 December 1997 (1997-12-09)</p> <p>page 27, line 25 -page 29, line 64; claims 1,2,4-6,10; figures 7,7A,8,9</p> <p style="text-align: center;">---</p> | <p>1,2,4,5, 8,9,11, 12,15, 16,18, 19,22, 24-26, 28,29, 41-44</p> |
| X | <p>EP 0 487 921 A (KAO CORP) 3 June 1992 (1992-06-03) page 2, line 36 -page 3, line 41 page 4, line 16 -page 6, line 41 claims 1-4; figures 1-9</p> <p style="text-align: center;">---</p> | <p>1,22,30, 40</p> |
| X | <p>WO 96 35402 A (PROCTER & GAMBLE) 14 November 1996 (1996-11-14) page 6, line 34 -page 7, line 23 page 9, line 1 -page 10, line 11 page 14, line 31 -page 24, line 18 page 29, line 21 -page 30, line 19 page 32, line 11 - line 33 claims 1,3-7,9; figures 1-13</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-/--</p> | <p>1,4,6,22</p> |

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/27733

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| A | EP 0 190 881 A (PROCTER & GAMBLE) 13 August 1986 (1986-08-13) page 5, line 4 - line 16 page 6, line 5 - line 14 page 8, line 1 - line 32 page 10, line 18 - line 24 page 12, line 3 - line 14; figures 1,2 --- | 1,15,22, 28,41-44 |
| A | US 4 500 316 A (DAMICO JOYCE A) 19 February 1985 (1985-02-19) figures 1,,2A,3,4,8 --- | 3 |
| X | EP 0 641 552 A (KAO CORP) 8 March 1995 (1995-03-08) column 9, line 49 -column 10, line 14 figure 6 --- | 39 |
| X | EP 0 703 068 A (MINNESOTA MINING & MFG) 27 March 1996 (1996-03-27) page 5, line 14 - line 27 page 6, line 22 -page 8, line 13 figures 3-16 --- | 39 |
| X | WO 96 29038 A (PROCTER & GAMBLE ;HEKI YUKIO (JP); HIUKE TAKASHI (JP)) 26 September 1996 (1996-09-26) page 13, line 19 -page 16, line 24 figures 1-12 --- | 39 |
| X | EP 0 803 602 A (JAPAN ABSORBENT TECHNOLOGY INS) 29 October 1997 (1997-10-29) figures 20,25,31,33,37 page 2, line 56 -page 3, line 13 page 5, line 5 - line 25 page 12, line 5 -page 55, line 14 --- | 39 |
| A | EP 0 832 628 A (KIMBERLY CLARK CO) 1 April 1998 (1998-04-01) column 6, line 13 -column 8, line 27 figures 2-6 --- | 39 |
| A | WO 98 02300 A (PROCTER & GAMBLE) 22 January 1998 (1998-01-22) page 2, line 14 - line 20 page 4, line 12 - line 27 figures 1-2A ----- | 39 |

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 99/27733

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-38,40-44

a pant comprising a chassis and elastic side panels, the width of an elastic side panel being at least equal to 30% of the width of the back of the chassis

2. Claim : 39

An article of apparel comprising elastic panels comprising a plurality of deadened elastic zones that extend along the vertical axis of the body; the panels further comprising live elastic zones interspersed between deadened elastic zones

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/27733

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| US 5370634 A | 06-12-1994 | JP 3015067 B | 28-02-2000 |
| | | JP 4035663 A | 06-02-1992 |
| | | GB 2244422 A,B | 04-12-1991 |
| | | HK 105994 A | 14-10-1994 |
| EP 0433951 A | 26-06-1991 | AT 141777 T | 15-09-1996 |
| | | AU 648211 B | 14-04-1994 |
| | | AU 3033792 A | 11-02-1993 |
| | | AU 637661 B | 03-06-1993 |
| | | AU 6822290 A | 27-06-1991 |
| | | BR 9006473 A | 01-10-1991 |
| | | CA 2031435 A | 20-06-1991 |
| | | DE 69028287 D | 02-10-1996 |
| | | DE 69028287 T | 03-04-1997 |
| | | ES 2090078 T | 16-10-1996 |
| | | JP 4102452 A | 03-04-1992 |
| | | KR 163177 B | 15-12-1998 |
| | | US 5527302 A | 18-06-1996 |
| | | ZA 9009850 A | 30-10-1991 |
| US 5749866 A | 12-05-1998 | US 5569232 A | 29-10-1996 |
| | | US 5554145 A | 10-09-1996 |
| | | AU 700813 B | 14-01-1999 |
| | | AU 1746395 A | 11-09-1995 |
| | | BR 9506912 A | 16-09-1997 |
| | | CA 2182873 A | 31-08-1995 |
| | | CN 1144472 A | 05-03-1997 |
| | | CZ 9602469 A | 15-01-1997 |
| | | DE 69510923 D | 26-08-1999 |
| | | DE 69510923 T | 20-01-2000 |
| | | EG 20605 A | 30-09-1999 |
| | | EP 0748197 A | 18-12-1996 |
| | | ES 2133741 T | 16-09-1999 |
| | | FI 963355 A | 28-08-1996 |
| | | GR 3030842 T | 30-11-1999 |
| | | HU 77402 A | 28-04-1998 |
| | | JP 9509350 T | 22-09-1997 |
| | | NO 963555 A | 25-10-1996 |
| | | SG 44635 A | 19-12-1997 |
| | | TR 28798 A | 25-03-1997 |
| | | WO 9522951 A | 31-08-1995 |
| | | US 5556394 A | 17-09-1996 |
| | | US 5554143 A | 10-09-1996 |
| | | US 5554144 A | 10-09-1996 |
| | | US 5947948 A | 07-09-1999 |
| | | ZA 9501648 A | 13-11-1996 |
| US 5695488 A | 09-12-1997 | US 5593401 A | 14-01-1997 |
| | | AU 690725 B | 30-04-1998 |
| | | AU 3098995 A | 04-03-1996 |
| | | AU 698415 B | 29-10-1998 |
| | | AU 5645698 A | 21-05-1998 |
| | | CA 2143237 A | 04-02-1996 |
| | | CA 2196602 A | 15-02-1996 |
| | | EP 0773770 A | 21-05-1997 |
| | | JP 10504741 T | 12-05-1998 |
| | | WO 9603951 A | 15-02-1996 |
| | | ZA 9506368 A | 12-03-1996 |

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 99/27733

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| EP 0487921 A | 03-06-1992 | JP 4166150 A | 12-06-1992 |
| | | JP 7044945 B | 17-05-1995 |
| | | JP 2902502 B | 07-06-1999 |
| | | JP 4364845 A | 17-12-1992 |
| | | DE 69113213 D | 26-10-1995 |
| | | HK 1001668 A | 03-07-1998 |
| | | US 5449353 A | 12-09-1995 |
| | | US 5415649 A | 16-05-1995 |
| WO 9635402 A | 14-11-1996 | AU 5564396 A | 29-11-1996 |
| | | EP 0957861 A | 24-11-1999 |
| | | JP 10510199 T | 06-10-1998 |
| | | US 5899895 A | 04-05-1999 |
| | | US 5997521 A | 07-12-1999 |
| EP 0190881 A | 13-08-1986 | AT 68337 T | 15-11-1991 |
| | | AU 599899 B | 02-08-1990 |
| | | AU 5463886 A | 17-09-1987 |
| | | CA 1259151 A | 12-09-1989 |
| | | DE 3681933 A | 21-11-1991 |
| | | GB 2186477 A | 19-08-1987 |
| | | HK 50494 A | 27-05-1994 |
| | | JP 2540495 B | 02-10-1996 |
| | | JP 61247450 A | 04-11-1986 |
| | | US 4704115 A | 03-11-1987 |
| US 4500316 A | 19-02-1985 | AU 566552 B | 22-10-1987 |
| | | AU 2852684 A | 06-12-1984 |
| | | BE 899794 A | 17-09-1984 |
| | | CA 1228953 A | 10-11-1987 |
| | | DE 3420288 A | 28-02-1985 |
| | | EP 0164435 A | 18-12-1985 |
| | | FR 2546745 A | 07-12-1984 |
| | | GB 2143115 A,B | 06-02-1985 |
| | | HK 50292 A | 17-07-1992 |
| | | IT 1179384 B | 16-09-1987 |
| | | JP 1822139 C | 10-02-1994 |
| | | JP 5022543 B | 29-03-1993 |
| | | JP 60075055 A | 27-04-1985 |
| | | KR 9200736 B | 21-01-1992 |
| | | MX 161428 A | 25-09-1990 |
| | | NL 8401656 A,B, | 02-01-1985 |
| | | NL 9800001 A | 01-04-1998 |
| | | SE 459631 B | 24-07-1989 |
| | | SE 8402913 A | 02-12-1984 |
| | | ZA 8403869 A | 30-01-1985 |
| EP 0641552 A | 08-03-1995 | JP 7116191 A | 09-05-1995 |
| | | CN 1103775 A | 21-06-1995 |
| | | DE 69422102 D | 20-01-2000 |
| | | DE 69422102 T | 27-04-2000 |
| | | SG 59943 A | 22-02-1999 |
| EP 0703068 A | 27-03-1996 | US 5376430 A | 27-12-1994 |
| | | AU 669920 B | 27-06-1996 |
| | | AU 4535093 A | 24-01-1994 |
| | | AU 676124 B | 27-02-1997 |
| | | AU 5070796 A | 04-07-1996 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/27733

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|---|--|
| EP 0703068 A | | BR 9306297 A CA 2129981 A DE 69304066 D DE 69304066 T EP 0646062 A ES 2091016 T IL 105744 A JP 7508473 T MX 9303520 A WO 9400292 A US 5422178 A US 5462708 A | 30-06-1998 06-01-1994 19-09-1996 20-02-1997 05-04-1995 16-10-1996 31-01-1996 21-09-1995 31-01-1994 06-01-1994 06-06-1995 31-10-1995 |
| WO 9629038 A | 26-09-1996 | JP 2868706 B JP 8266572 A AU 5357696 A CA 2213802 A EP 0814740 A US 5906008 A | 10-03-1999 15-10-1996 08-10-1996 26-09-1996 07-01-1998 25-05-1999 |
| EP 0803602 A | 29-10-1997 | JP 7252762 A JP 9059862 A WO 9621760 A | 03-10-1995 04-03-1997 18-07-1996 |
| EP 0832628 A | 01-04-1998 | EP 0838205 A AU 657994 B AU 2350692 A BR 9203247 A CA 2057739 A DE 69227563 D DE 69227563 T EG 19451 A EP 0532034 A ES 2122977 T JP 5200069 A MX 9204691 A TR 27362 A US 5685873 A ZA 9206773 A | 29-04-1998 30-03-1995 18-03-1993 13-04-1993 12-03-1993 17-12-1998 17-06-1999 30-03-1995 17-03-1993 01-01-1999 10-08-1993 01-03-1993 17-01-1995 11-11-1997 10-03-1993 |
| WO 9802300 A | 22-01-1998 | AU 3659397 A EP 0912334 A | 09-02-1998 06-05-1999 |

